

Vehicle Service and Support Programs that Provide Remarkable Lifecycle Value



Vehicle Health Reports

Performed at each scheduled maintenance cycle, this report provides operational data that helps maximize a lower cost of ownership



FleetValue Parts

Maintenance and replacement parts that enhance a low cost of ownership.



4 Years / 200,000 KM

4 Years / 200,000 Kilometers
Oil Changes Included



5 Years / 280,000 Kilometers

Powertrain Plus
Warranty Coverage

Isuzu features are designed to make the driver more comfortable and improve efficiency while enhancing productivity.



Standard Interior Seats Shown



Optional Seat Covers Shown



Crew Cab Has 7-Passenger Capacity With 4-Across Seating In Back



Optional Air Deflector



Optional Vertical Exhaust



Optional Bluetooth Radio




Optional Locking DEF Cap



Optional Additional Fuel Tank



Microphone Included With
Optional Bluetooth Radio



Optional Heated Remote Control
Mirrors



Remote Mirror Controls Included With Optional Heated
Remote Control Mirrors

For additional information on Isuzu's full line of Low Cab Forward trucks please visit www.isuzutruck.ca or call (866) 441-9638

All photographs, illustrations, equipment and technical data in this brochure are based on the latest information available at the time of publication. Isuzu Commercial Truck of America, Inc. reserves the right to make changes at any time, without notice, in prices, colors, materials, equipment, specifications and models, and to discontinue models or equipment. Isuzu vehicles are assembled from component parts manufactured by Isuzu Motors Limited, its affiliated companies, and by independent suppliers who manufacture such components to Isuzu's exacting standards for quality, performance and safety. Some vehicles are shown with optional equipment. Some equipment is dealer installed. Visit your authorized Isuzu dealer for warranty and other details. NPR, NPR-HD, NPR-XD, NQR, and NRR are trademarks of Isuzu Motors Limited. Truck bodies represented herein are products of Supreme Corporation, M.H.Eby, Inc., Morgan Corporation, The Reading Group LLC, Tymco, Inc., Switch N Go a division of Deist Industries, Inc., Aero Tech Manufacturing, Inc., Thermo King, and New Way Refuse Trucks a product of Scranton Manufacturing Company. Facebook is a registered trademark of Facebook, Inc. Instagram is a registered trademark of Instagram, LLC. Twitter is a registered trademark of Twitter, Inc. LinkedIn is a registered trademark of LinkedIn Corporation. Google+ is a registered trademark of Google, Inc. Isuzu is not sponsored by or affiliated with these platforms.



Copyright © 2017 Isuzu Commercial Truck of Canada, Inc.
TM 10212-CAN (4/17)



N-SERIES



GAS

N-Series Gas

Your Gas Low Cab Forward for the Medium Duty Market

Standard Cab:

Body choices 10 to 20 ft.*
GVWRs 12,000 to 14,500 lbs.
Wheelbases 109.0 to 176.0 in.

Crew Cab: Seating for Seven

Body choices 12 to 16 ft.*
GVWRs 12,000 to 14,500 lbs.
Wheelbases 150.0 to 176.0 in.

Easy to Drive:

Outstanding driver visibility and maneuverability that provides an exceptional driving experience

Gas Choices:

297hp 6.0L with
CNG/LPG Capability



NPR

Gas or CNG/LPG Capable
12,000 lb. GVWR
Body of your choice
up to 20 ft.*

NPR-HD

Gas or CNG/LPG Capable
14,500 lb. GVWR
Body of your choice
up to 20 ft.*

NPR

Crew Cab

Gas or CNG/LPG Capable
12,000 lb. GVWR
Body of your choice
up to 16 ft.*

NPR-HD

Crew Cab

Gas or CNG/LPG Capable
14,500 lb. GVWR
Body of your choice
up to 16 ft.*

* Wheelbase dimension determines maximum body length.

N-Series Diesel

13,000 lbs. GVWR -
19,500 lbs. GVWR

Standard Cab:

Body choices 10 to 24 ft.*
GVWRs 13,000 to 19,500 lbs.
Wheelbases 109.0 to 212.0 in.

Crew Cab: Seating for Seven

Body choices 12 to 16 ft.*
GVWRs 14,500 to 17,950 lbs.
Wheelbases 150.0 to 176.0 in.

Easy to Drive:

Outstanding driver visibility and
maneuverability that provide an
exceptional driving experience



ISUZU
5.2L 4HK1-TC
B10
RATING
375,000

NPR

150 hp. 3.0L
13,000 lb. GVWR
Body of your choice
up to 20 ft.*

NRR

215 hp. 5.2L
19,500 lb. GVWR
Body of your choice
up to 24 ft.*

NPR-HD

215 hp. 5.2L
14,500 lb. GVWR
Body of your choice
up to 20 ft.*

NPR-HD

215 hp. 5.2L
14,500 lb. GVWR
Body of your choice
up to 16 ft.*

NPR-XD

215 hp. 5.2L
16,000 lb. GVWR
Body of your choice
up to 20 ft.*

NPR-XD

215 hp. 5.2L
16,000 lb. GVWR
Body of your choice
up to 16 ft.*

NQR

215 hp. 5.2L
17,950 lb. GVWR
Body of your choice
up to 22 ft.*


NQR

215 hp. 5.2L
17,950 lb. GVWR
Body of your choice
up to 16 ft.*

Crew Cab

* Wheelbase dimension determines maximum body length.

N-Series Dimensions Diesel (Illustrated) Gas (See Charts)

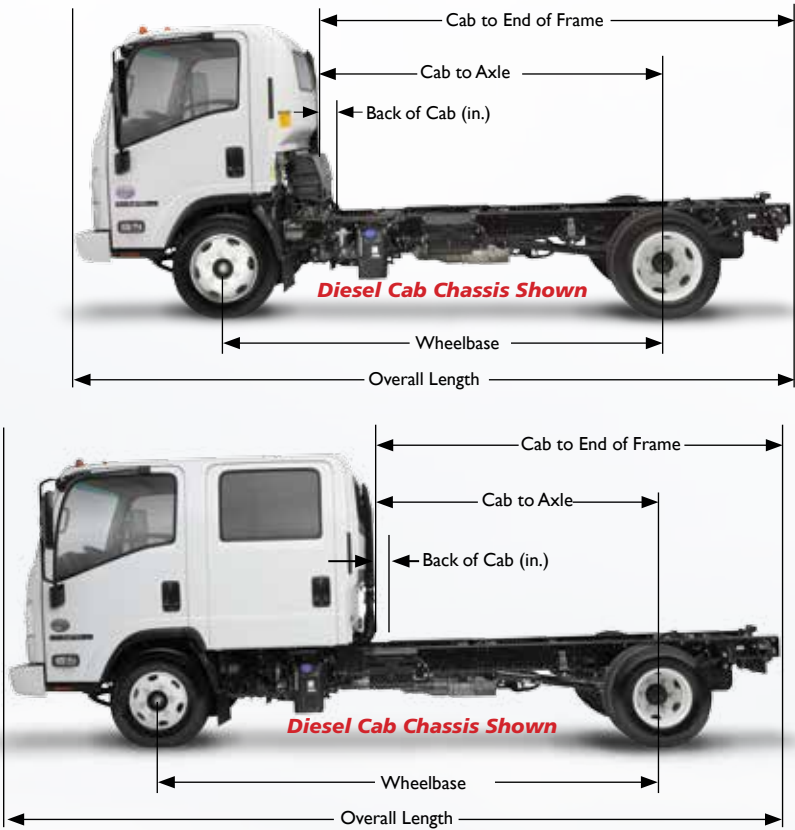

N-SERIES TRUCKS

NPR, NPR-HD, NPR-XD, NQR, NRR									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
109.0	86.5	129.6	7.7	200.5	81.3	65.6	90.8/92.4	10-12	
132.5	110.0	153.1	7.7	224.0	81.3	65.6	90.8/92.4	14	
150.0	127.5	170.6	7.7	241.5	81.3	65.6	90.8/92.4	16-18	
176.0	153.5	196.6	7.7	267.5	81.3	65.6	90.8/92.4	18-20	
200.0 ⁱⁱ	177.5	220.6	7.7	291.5	81.3	65.6	92.4	22	
212.0 ⁱⁱⁱ	189.5	232.6	7.7	303.5	81.3	65.6	92.4	24	

ⁱNPR-HD only 10.2 ⁱⁱNQR, NRR only ⁱⁱⁱNRR only *NPR only 6.1
**NPR, NPR-HD/NPR-XD, NQR, NRR

NPR / NPR-HD GAS									
Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)	
109.0	86.5	129.6	6.5	200.5	81.3	65.6	90.8	10-12	
132.5	110.0	153.1	6.5	224.0	81.3	65.6	90.8	14	
150.0	127.5	170.6	6.5	241.5	81.3	65.6	90.8	16-18	
176.0	153.5	196.6	6.5	267.5	81.3	65.6	90.8	18-20	

NPR-HD / NPR-XD / NQR DIESEL CREW CAB

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)
150.0	88.5	131.6	5.3	241.5	81.3	65.6	90.8/92.4	12
176.0	114.5	157.6	5.3	267.5	81.3	65.6	90.8/92.4	16

*NPR-HD Crew Cab/NPR-XD Crew Cab, NQR Crew Cab

NPR / NPR-HD GAS CREW CAB

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)	Body Length (ft.)
150.0	88.5	131.6	5.0	241.5	81.3	65.6	90.0/91.1	12
176.0	114.5	157.6	5.0	267.5	81.3	65.6	90.0/91.1	16

2017/2018 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle kilometres*	Parts	Labor
Basic	0-3 Years	Unlimited	No Charge	No Charge
Engine	0-3 Years	Unlimited	No Charge	No Charge
• Transmission	0-3 Years	Unlimited	No Charge	No Charge
• Drive Axle				
• Driveshaft				
• Front Axle I-Beam				
• Crossmembers				
• Flywheel Housing				
• Clutch Housing				
Frame Rails	0-3 Years	Unlimited	No Charge	No Charge
	3-5 Years	Unlimited	50%	50%
Cab Sheet Metal (Rust through)	0-5 Years	Unlimited	No Charge	No Charge
Cab Sheet Metal (Corrosion)	0-3 Years	Unlimited	No Charge	No Charge
Engine Emission Control System	0-5 Years	0-160,000	No Charge	No Charge
Tire	0-2 Years	0-38,400	No Charge	No Charge

2017 ISUZU N-SERIES GAS WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle kilometres*	Parts	Labor
Basic (See "What's covered")	0-3 Years	0-60,000	No Charge	No Charge
Engine	0-5 Years	0-120,000	No Charge	No Charge
• Transmission				
• Drive Axle				
Frame Rails	0-3 Years	0-60,000	No Charge	No Charge
	3-5 Years	Unlimited	50%	50%
Cab Sheet Metal (Rust through)	0-5 Years	Unlimited	No Charge	No Charge
Cab Sheet Metal (Corrosion)	0-3 Years	Unlimited	No Charge	No Charge
Engine Emission Control System	0-5 Years	0-80,000	No Charge	No Charge

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
The warranty coverages are limited by whichever occurs first.
See your authorized Isuzu dealer for warranty details.

GAS N-Series Specifications

	NPR Gas	NPR Gas Crew Cab	NPR-HD Gas	NPR-HD Gas Crew Cab
GVWR/GCWR	12,000/18,000 lbs.	12,000/18,000 lbs.	14,500/20,500 lbs.	14,500/20,500 lbs.
BODY/PAYLOAD ALLOWANCE	6,782-6,978 lbs.	6,246-6,308 lbs.	8,977-9,174 lbs.	8,442-8,503 lbs.
GAWR				
Front	4,860 lbs.	4,860 lbs.	6,630 lbs.	6,630 lbs.
Rear	8,840 lbs.	8,840 lbs.	11,020 lbs.	11,020 lbs.
FRONT AXLE CAPACITY	6,830 lbs.	6,830 lbs.	6,830 lbs.	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.	11,020 lbs.	11,020 lbs.	11,020 lbs.
Ratio	5.125	5.125	5.375	5.375
SUSPENSION F/R SPRINGS				
Capacity	Tapered/Multi-Leaf 8,440/12,900 lbs.	Tapered/Multi-Leaf 8,440/12,900 lbs.	Tapered/Multi-Leaf 8,440/12,900 lbs.	Tapered/Multi-Leaf 8,440/12,900 lbs.
FRAME				
Section Modulus	7.20 in. ³	7.20 in. ³	7.20 in. ³	7.20 in. ³
Resistance Bending Moment	316,800 lb.-ft./in.	316,800 lb.-ft./in.	316,800 lb.-ft./in.	316,800 lb.-ft./in.
SERVICE BRAKES				
Front/Rear	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum
TRANSMISSION	6L90 6-speed auto. with double overdrive and lock-up converter	6L90 6-speed auto. with double overdrive and lock-up converter	6L90 6-speed auto. with double overdrive and lock-up converter	6L90 6-speed auto. with double overdrive and lock-up converter
ENGINE				
	GMPT L96 (Gen IV) V8 Vortec 6000 (Optional: KL8-Alternative Fuel Capable Engine)	GMPT L96 (Gen IV) V8 Vortec 6000 (Optional: KL8-Alternative Fuel Capable Engine)	GMPT L96 (Gen IV) V8 Vortec 6000 (Optional: KL8-Alternative Fuel Capable Engine)	GMPT L96 (Gen IV) V8 Vortec 6000 (Optional: KL8-Alternative Fuel Capable Engine)
Displacement	6.0L (365 in. ³)	6.0L (365 in. ³)	6.0L (365 in. ³)	6.0L (365 in. ³)
Engine Power	297hp @ 4,300 rpm	297hp @ 4,300 rpm	297hp @ 4,300 rpm	297hp @ 4,300 rpm
Engine Torque	372 lb.-ft. @ 4,000 rpm	372 lb.-ft. @ 4,000 rpm	372 lb.-ft. @ 4,000 rpm	372 lb.-ft. @ 4,000 rpm
LIMITED SLIP DIFFERENTIAL	Optional	Optional	Optional	Optional
ALTERNATOR	145-amp	145-amp	145-amp	145-amp
BATTERIES	1 Maintenance-Free 750-CCA	1 Maintenance-Free 750-CCA	1 Maintenance-Free 750-CCA	1 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr) Standard	215/85R16E (10-pr) Standard	225/70R19.5G (14-pr) Standard	225/70R19.5G (14-pr) Standard
STEERING	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic
FUEL TANK	30 gal. in-frame	30 gal. in-frame	30 gal. in-frame	30 gal. in-frame




Diesel N-Series Specifications

	NPR	NPR-HD	NPR-HD Crew Cab	NPR-XD	NPR-XD Crew Cab	NQR	NQR Crew Cab	NRR	
GVWR/GCWR	13,000/19,000 lbs.	14,500/20,500 lbs.	14,500/20,500 lbs.	16,000 lbs./22,000 lbs.	16,000 lbs./22,000 lbs.	17,950/23,950 lbs.	17,950/23,950 lbs.	19,500/25,500 lbs.	GVWR/GCWR
BODY/PAYLOAD ALLOWANCE	7,435-7,607 lbs.	8,339-8,536 lbs.	7,766-7,832 lbs.	9,410-9,607 lbs.	8,840-8,905 lbs.	10,939-11,461 lbs.	10,680-10,748 lbs.	12,294-12,875 lbs.	BODY/PAYLOAD ALLOWANCE
GAWR Front Rear	5,360 lbs. 9,880 lbs.	5,360 lbs. 9,880 lbs.	5,360 lbs. 9,880 lbs.	6,630 lbs. 11,020 lbs.	6,630 lbs. 11,020 lbs.	6,830 lbs. 12,980 lbs.	6,830 lbs. 12,980 lbs.	7,275 lbs. 13,660 lbs.	GAWR Front Rear
FRONT AXLE CAPACITY	6,830 lbs.	6,830 lbs.	6,830 lbs.	6,830 lbs.	6,830 lbs.	6,830 lbs.	6,830 lbs.	7,275 lbs.	FRONT AXLE CAPACITY
REAR AXLE CAPACITY Ratio	11,020 lbs. 5.125	11,020 lbs. 4.555	11,020 lbs. 4.555	11,020 lbs. 4.777	11,020 lbs. 4.777	14,550 lbs. 5.125	14,550 lbs. 5.125	14,550 lbs. 5.571	REAR AXLE CAPACITY Ratio
SUSPENSION F/R SPRINGS Capacity	Tapered/Multi-Leaf 6,830/9,880 lbs.	Tapered/Multi-Leaf 6,830/9,880 lbs.	Tapered/Multi-Leaf 6,830/9,880 lbs.	Tapered/Multi-Leaf 8,440/14,308 lbs.	Tapered/Multi-Leaf 8,440/14,308 lbs.	Tapered/Multi-Leaf 8,440/14,550 lbs.	Tapered/Multi-Leaf 8,440/14,550 lbs.	Tapered/Multi-Leaf 8,440/14,550 lbs.	SUSPENSION F/R SPRINGS Capacity
FRAME Section Modulus Resistance Bending Moment	7.20 in. ³ 316,800 lb.-ft./in.	7.20 in. ³ 316,800 lb.-ft./in.	11.89 in. ³ 523,160 lb.-ft./in.	7.20 in. ³ 316,800 lb.-ft./in.	11.89 in. ³ 523,160 lb.-ft./in.	7.20 in. ³ 316,800 lb.-ft./in.	11.89 in. ³ 523,160 lb.-ft./in.	7.20 in. ³ 316,800 lb.-ft./in.	FRAME Section Modulus Resistance Bending Moment
SERVICE BRAKES Front/Rear	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum	Hydraulic Boosted with 4-Channel ABS Disc/Drum	Hydraulic Boosted with 4-Channel ABS Disc/Drum	Hydraulic Boosted with 4-Channel ABS Disc/Drum	SERVICE BRAKES Front/Rear
EXHAUST BRAKE	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	EXHAUST BRAKE
TRANSMISSION	Aisin A460 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears	TRANSMISSION
ENGINE	Isuzu 4JJ1-TC turbocharged intercooled diesel	Isuzu 4HK1-TC turbocharged intercooled diesel	Isuzu 4HK1-TC turbocharged intercooled diesel	Isuzu 4HK1-TC turbocharged intercooled diesel	Isuzu 4HK1-TC turbocharged intercooled diesel	Isuzu 4HK1-TC turbocharged intercooled diesel	Isuzu 4HK1-TC turbocharged intercooled diesel	Isuzu 4HK1-TC turbocharged intercooled diesel	ENGINE
Displacement Engine Power Engine Torque	3.0L (183 in. ³) 150hp @ 2,800 rpm 282 lb.-ft. @ 1,600-2,800 rpm	5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	5.2L (317 in. ³) 215hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm	Displacement Engine Power Engine Torque
Oil Level Indicator	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Dash-mounted oil level check switch and light	Oil Level Indicator
LIMITED SLIP DIFFERENTIAL	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	LIMITED SLIP DIFFERENTIAL
ALTERNATOR	140-amp	140-amp	140-amp	140-amp	140-amp	140-amp	140-amp	140-amp	ALTERNATOR
BATTERIES	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	2 Maintenance-Free 750-CCA	BATTERIES
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr) Standard	215/85R16E (10-pr) Standard	215/85R16E (10-pr) Standard	225/70R19.5F (12-pr) Standard	225/70R19.5F (12-pr) Standard	225/70R19.5F (12-pr) Standard	225/70R19.5F (12-pr) Standard	225/70R19.5F (12-pr) Standard	TIRES LRR (Low Rolling Resistance)
STEERING	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	Integral Hydraulic Power	STEERING
STEERING COLUMN	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	Tilt and Telescopic	STEERING COLUMN
FUEL TANK Standard Optional	30 gal. in-rail N/A	30 gal. in-rail 33 gal. side mount (176" WB Only)	30 gal. in-rail N/A	30 gal. in-rail 33 gal. side mount (176" WB Only)	30 gal. in-rail N/A	30 gal. in-rail 33 gal. side mount (176" WB Only)	30 gal. in-rail N/A	30 gal. in-rail 33 gal. side mount (176" WB Only)	FUEL TANK Standard Optional
FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	Dual fuel filter with dash mounted indicator light	FUEL/WATER SEPARATOR

NPR Gas

STANDARD CAB

GVWR/GCWR	12,000/18,000 lbs.
BODY/PAYLOAD ALLOWANCE	6,782 - 6,978 lbs.
GAWR	
Front	4,860 lbs.
Rear	8,840 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.
Ratio	5.125
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/12,900 lbs.
FRAME	
Section Modulus	7.20 in. ³
Resistance Bending Moment	316,800 lb.-ft./in.
SERVICE BRAKES	Vacuum/Hydraulic with
Front/Rear	4-Channel ABS Disc/Drum
TRANSMISSION	6L90 6-speed auto. with
	double overdrive and
	lock-up converter
ENGINE	GMPT L96 (Gen IV) V8 Vortec
	6000 (Optional: KL8 - Alternative
	Fuel Capable Engine)
Displacement	6.0L (365 in. ³)
Engine Power	297 hp @ 4,300 rpm
Engine Torque	372 lb.-ft. @ 4,000 rpm
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	145-amp
BATTERIES	1 Maintenance-Free
	750-CCA
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr)
	Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-frame

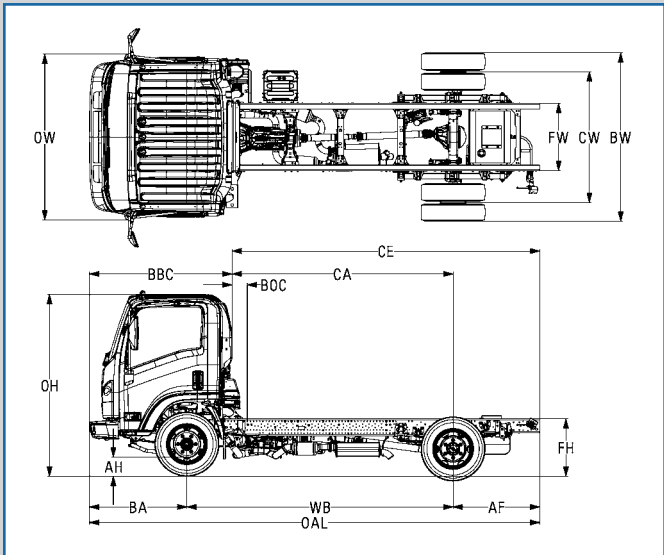

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (ft.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
109.0	86.5	129.6	6.5	200.5	10-12	81.3	65.6	90.0
132.5	110.0	153.1	6.5	224.0	14	81.3	65.6	90.0
150.0	127.5	170.6	6.5	241.5	16-18	81.3	65.6	90.0
176.0	153.5	196.6	6.5	267.5	18-20	81.3	65.6	90.0

2017 ISUZU N-SERIES GAS WARRANTY COVERAGE AT A GLANCE


Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle kilometres*	Parts	Labor
Basic (See "What's covered")	0-3 Years	0-60,000	No Charge	No Charge
Engine				
• Transmission				
• Drive Axle				
	0-5 Years	0-120,000	No Charge	No Charge
Frame Rails	0-3 Years	0-60,000	No Charge	No Charge
	3-5 Years	Unlimited	50%	50%
Cab Sheet Metal (Rust through)	0-5 Years	Unlimited	No Charge	No Charge
Cab Sheet Metal (Corrosion)	0-3 Years	Unlimited	No Charge	No Charge
Engine Emission Control System	0-5 Years	0-80,000	No Charge	No Charge

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. The warranty coverages are limited by whichever occurs first. See your authorized Isuzu dealer for warranty details.

NPR Gas

CREW CAB

GVWR/GCWR	12,000/18,000 lbs.
BODY/PAYLOAD ALLOWANCE	6,246 - 6,308 lbs.
GAWR	
Front	4,860 lbs.
Rear	8,840 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.
Ratio	5.125
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/12,900 lbs.
FRAME	
Section Modulus	7.20 in. ³
Resistance Bending Moment	316,800 lb.-ft./in.
SERVICE BRAKES	Vacuum/Hydraulic with
Front/Rear	4-Channel ABS Disc/Drum
TRANSMISSION	6L90 6-speed auto. with
	double overdrive and
	lock-up converter
ENGINE	GMPT L96 (Gen IV) V8 Vortec
	6000 (Optional: KL8 - Alternative
	Fuel Capable Engine)
Displacement	6.0L (365 in. ³)
Engine Power	297 hp @ 4,300 rpm
Engine Torque	372 lb.-ft. @ 4,000 rpm
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	145-amp
BATTERIES	1 Maintenance-Free
	750-CCA
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr)
	Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-frame

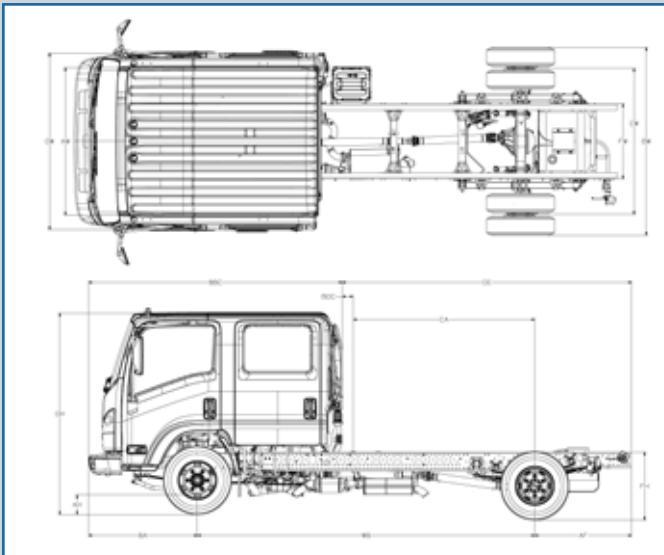

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (ft.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
150.0	88.5	131.6	5.0	241.5	12	81.3	65.6	90.0
176.0	114.5	157.6	5.0	267.5	16	81.3	65.6	90.0

2017 ISUZU N-SERIES GAS WARRANTY COVERAGE AT A GLANCE


Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle kilometres*	Parts	Labor
Basic (See "What's covered")	0-3 Years	0-60,000	No Charge	No Charge
Engine				
• Transmission				
• Drive Axle				
	0-5 Years	0-120,000	No Charge	No Charge
Frame Rails	0-3 Years	0-60,000	No Charge	No Charge
	3-5 Years	Unlimited	50%	50%
Cab Sheet Metal (Rust through)	0-5 Years	Unlimited	No Charge	No Charge
Cab Sheet Metal (Corrosion)	0-3 Years	Unlimited	No Charge	No Charge
Engine Emission Control System	0-5 Years	0-80,000	No Charge	No Charge

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. The warranty coverages are limited by whichever occurs first. See your authorized Isuzu dealer for warranty details.



NPR-HD Gas
STANDARD CAB

GVWR/GCWR	14,500/20,500 lbs.
BODY/PAYLOAD ALLOWANCE	8,977 - 9,174 lbs.
GAWR	
Front	6,630 lbs.
Rear	11,020 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.
Ratio	5.375
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/12,900 lbs.
FRAME	
Section Modulus	7.20 in. ³
Resistance Bending Moment	316,800 lb.-ft./in.
SERVICE BRAKES	Vacuum/Hydraulic with
Front/Rear	4-Channel ABS Disc/Drum
TRANSMISSION	6L90 6-speed auto. with
	double overdrive and
	lock-up converter
ENGINE	GMPT L96 (Gen IV) V8 Vortec
	6000 (Optional: KL8 - Alternative
	Fuel Capable Engine)
Displacement	6.0L (365 in. ³)
Engine Power	297 hp @ 4,300 rpm
Engine Torque	372 lb.-ft. @ 4,000 rpm
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	145-amp
BATTERIES	1 Maintenance-Free
	750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5G (14-pr)
	Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-frame

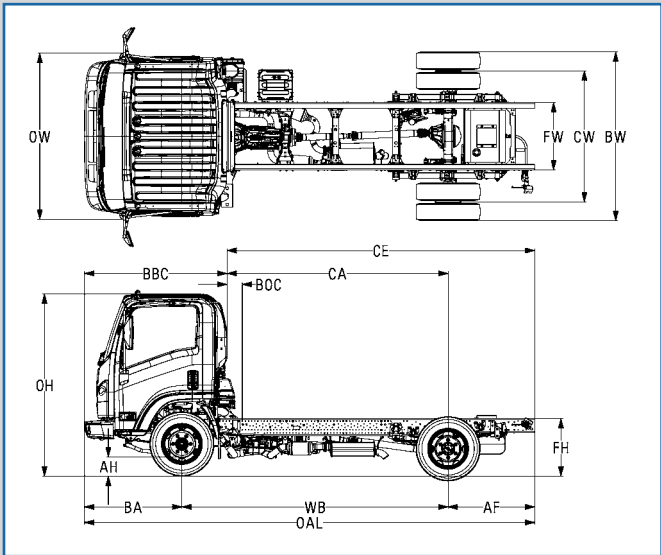

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (ft.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
109.0	86.5	129.6	6.5	200.5	10-12	81.3	65.6	90.9
132.5	110.0	153.1	6.5	224.0	14	81.3	65.6	90.9
150.0	127.5	170.6	6.5	241.5	16-18	81.3	65.6	90.9
176.0	153.5	196.6	6.5	267.5	18-20	81.3	65.6	90.9


2017 ISUZU N-SERIES GAS WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle kilometres*	Parts	Labor
Basic (See "What's covered")	0-3 Years	0-60,000	No Charge	No Charge
Engine				
• Transmission				
• Drive Axle	0-5 Years	0-120,000	No Charge	No Charge
Frame Rails	0-3 Years	0-60,000	No Charge	No Charge
	3-5 Years	Unlimited	50%	50%
Cab Sheet Metal (Rust through)	0-5 Years	Unlimited	No Charge	No Charge
Cab Sheet Metal (Corrosion)	0-3 Years	Unlimited	No Charge	No Charge
Engine Emission Control System	0-5 Years	0-80,000	No Charge	No Charge

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. The warranty coverages are limited by whichever occurs first. See your authorized Isuzu dealer for warranty details.

NPR-HD Gas
CREW CAB

GVWR/GCWR	14,500/20,500 lbs.
BODY/PAYLOAD ALLOWANCE	8,442 - 8,503 lbs.
GAWR	
Front	6,630 lbs.
Rear	11,020 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.
Ratio	5.375
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/12,900 lbs.
FRAME	
Section Modulus	7.20 in. ³
Resistance Bending Moment	316,800 lb.-ft./in.
SERVICE BRAKES	Vacuum/Hydraulic with
Front/Rear	4-Channel ABS Disc/Drum
TRANSMISSION	6L90 6-speed auto. with
	double overdrive and
	lock-up converter
ENGINE	GMPT L96 (Gen IV) V8 Vortec
	6000 (Optional: KL8 - Alternative
	Fuel Capable Engine)
Displacement	6.0L (365 in. ³)
Engine Power	297 hp @ 4,300 rpm
Engine Torque	372 lb.-ft. @ 4,000 rpm
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	145-amp
BATTERIES	1 Maintenance-Free
	750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5G (14-pr)
	Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-frame

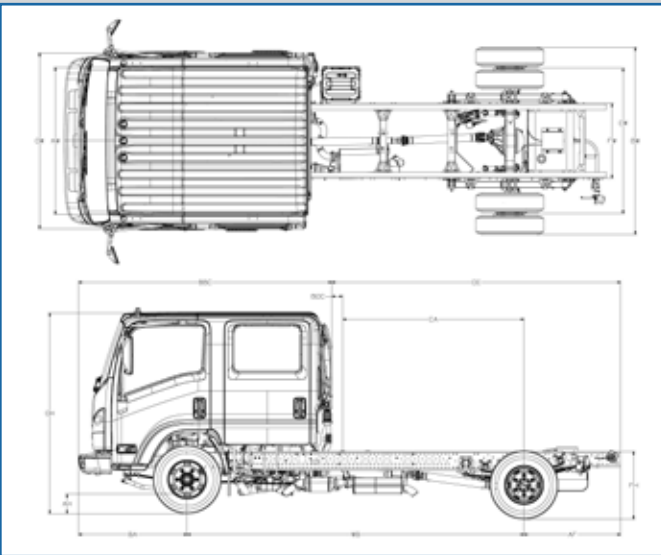

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (ft.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
150.0	88.5	131.6	5.0	241.5	12	81.3	65.6	91.1
176.0	114.5	157.6	5.0	267.5	16	81.3	65.6	91.1

2017 ISUZU N-SERIES GAS WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle kilometres*	Parts	Labor
Basic (See "What's covered")	0-3 Years	0-60,000	No Charge	No Charge
Engine				
• Transmission				
• Drive Axle	0-5 Years	0-120,000	No Charge	No Charge
Frame Rails	0-3 Years	0-60,000	No Charge	No Charge
	3-5 Years	Unlimited	50%	50%
Cab Sheet Metal (Rust through)	0-5 Years	Unlimited	No Charge	No Charge
Cab Sheet Metal (Corrosion)	0-3 Years	Unlimited	No Charge	No Charge
Engine Emission Control System	0-5 Years	0-80,000	No Charge	No Charge



* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. The warranty coverages are limited by whichever occurs first. See your authorized Isuzu dealer for warranty details.



NPR Diesel

STANDARD CAB

GVWR/GCWR	13,000/19,000 lbs.
BODY/PAYLOAD ALLOWANCE	7,435 - 7,607 lbs.
GAWR	
Front	5,360 lbs.
Rear	9,880 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.
Ratio	5.125
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	6,830/9,880 lbs.
FRAME	
Section Modulus	7.20 in. ³
Resistance Bending Moment	316,800 lb.-ft/in.
SERVICE BRAKES	Vacuum/Hydraulic with
Front/Rear	4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A460 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears
ENGINE	Isuzu 4JJ1-TC turbocharged intercooled diesel
Displacement	3.0L (183 in. ³)
Engine Power	150 hp @ 2,800 rpm
Engine Torque	282 lb.-ft. @ 1,600-2,800 rpm
Oil Level Indicator	Dash-mounted oil level check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-rail
FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light

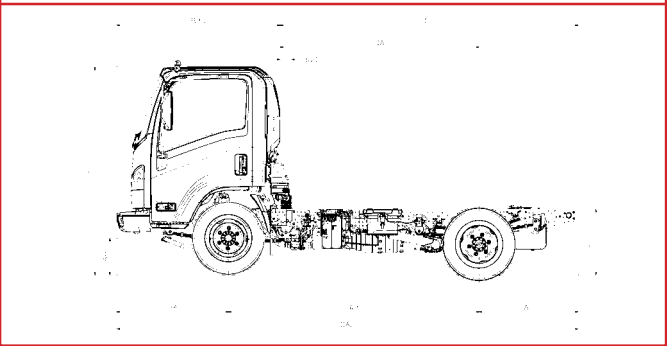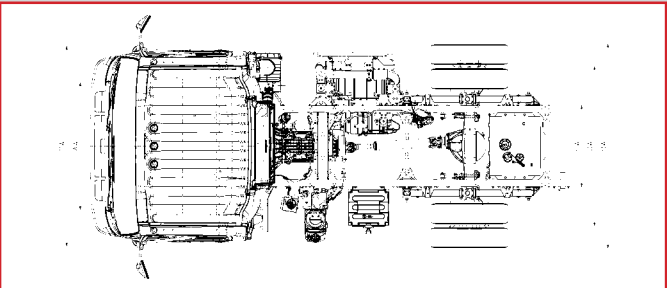

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (ft.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
109.0	86.5	129.6	6.1	200.5	10-12	81.3	65.6	90.8
132.5	110.0	153.1	6.1	224.0	14	81.3	65.6	90.8
150.0	127.5	170.6	6.1	241.5	16-18	81.3	65.6	90.8
176.0	153.5	196.6	6.1	267.5	18-20	81.3	65.6	90.8

2017 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle kilometres*	Parts	Labor
Basic	0-3 Years	Unlimited	No Charge	No Charge
Engine	0-3 Years	Unlimited	No Charge	No Charge
• Transmission • Drive Axle • Driveshaft • Front Axle I-Beam • Crossmembers • Flywheel Housing • Clutch Housing	0-3 Years	Unlimited	No Charge	No Charge
Frame Rails	0-3 Years	Unlimited	No Charge	No Charge
	3-5 Years	Unlimited	50%	50%
Cab Sheet Metal (Rust through)	0-5 Years	Unlimited	No Charge	No Charge
Cab Sheet Metal (Corrosion)	0-3 Years	Unlimited	No Charge	No Charge
Engine Emission Control System	0-5 Years	0-160,000	No Charge	No Charge
Tire	0-2 Years	0-38,400	No Charge	No Charge

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
The warranty coverages are limited by whichever occurs first.
See your authorized Isuzu dealer for warranty details.



NPR Diesel

13,000 lbs. GVWR
Class Leading Payload





Priced lower than a Class 4 truck

- Class leading payload 7,435 – 7,607 lbs.
- Accepts body lengths up to 20 feet
- Tighter turning radius with a 49.5 degree wheel cut angle
- Outstanding driver visibility and maneuverability
- 30-gallon rear mounted in-rail fuel tank
- 33.5" industry standard frame accepts bodies up to 102" wide and up to 91" body height
- Four wheelbases: 109", 132.5", 150", 176"
- 3.0L 150HP diesel with class-leading fuel economy, a B-10 diesel engine life of 310,000 miles and B20 biodiesel capable
- Aisin A460 6-speed automatic transmission with double overdrive and PTO capable

NPR-HD Diesel

STANDARD CAB

GVWR/GCWR	14,500/20,500 lbs.
BODY/PAYLOAD ALLOWANCE	8,339-8,536 lbs.
GAWR Front Rear	5,360 lbs. 9,880 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY Ratio	11,020 lbs. 4.555
SUSPENSION F/R SPRINGS Capacity	Tapered/Multi-Leaf 6,830/9,880 lbs.
FRAME Section Modulus Resistance Bending Moment	7.20 in. ³ 316,800 lb.-ft./in.
SERVICE BRAKES Front/Rear	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears
ENGINE Displacement Engine Power Engine Torque Oil Level Indicator	Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215 hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm Dash-mounted oil level check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK Standard Optional	30 gal. in-rail 33 gal. side mount (176" WB Only)
FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light

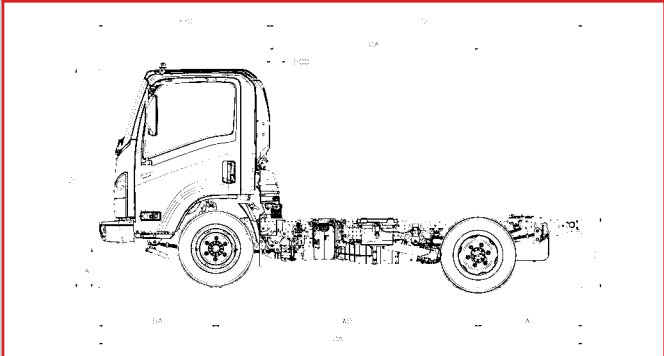
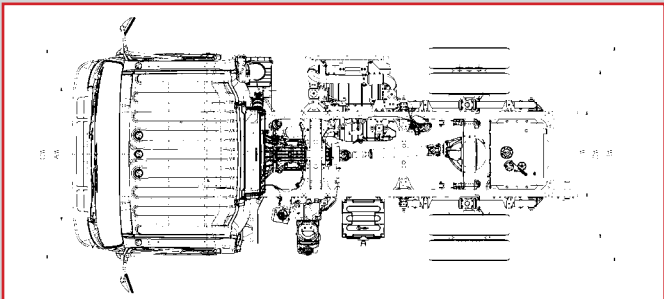


Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (ft.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
109.0	86.5	129.6	7.7	200.5	10-12	81.3	65.6	90.8
132.5	110.0	153.1	7.7	224.0	14	81.3	65.6	90.8
150.0	127.5	170.6	10.2	241.5	16-18	81.3	65.6	90.8
176.0	153.5	196.6	10.2	267.5	18-20	81.3	65.6	90.8

2018 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle kilometers*	Parts	Labor
Basic	0-3 Years	Unlimited	No Charge	No Charge
Engine	0-3 Years	Unlimited	No Charge	No Charge
• Transmission • Drive Axle • Driveshaft • Front Axle I-Beam • Crossmembers • Flywheel Housing • Clutch Housing	0-3 Years	Unlimited	No Charge	No Charge
Frame Rails	0-3 Years 3-5 Years	Unlimited Unlimited	No Charge 50%	No Charge 50%
Cab Sheet Metal (Rust through)	0-5 Years	Unlimited	No Charge	No Charge
Cab Sheet Metal (Corrosion)	0-3 Years	Unlimited	No Charge	No Charge
Engine Emission Control System	0-5 Years	0-160,000	No Charge	No Charge
Tire	0-2 Years	0-38,400	No Charge	No Charge

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
The warranty coverages are limited by whichever occurs first.
See your authorized Isuzu dealer for warranty details.

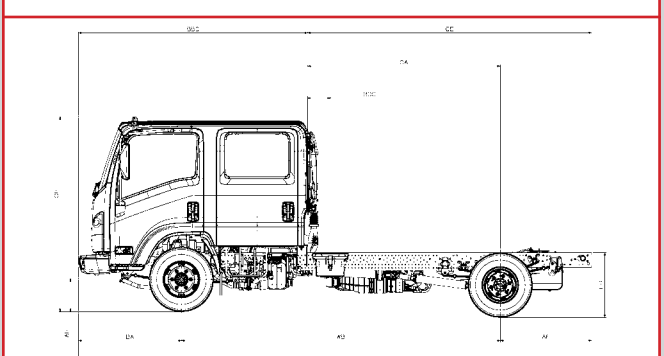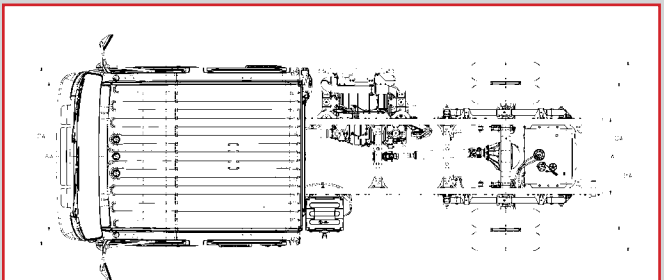

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (ft.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
150.0	88.5	131.6	5.3	241.5	12	81.3	65.6	90.8
176.0	114.5	157.6	5.3	267.5	16	81.3	65.6	90.8

2018 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle kilometers*	Parts	Labor
Basic	0-3 Years	Unlimited	No Charge	No Charge
Engine	0-3 Years	Unlimited	No Charge	No Charge
• Transmission • Drive Axle • Driveshaft • Front Axle I-Beam • Crossmembers • Flywheel Housing • Clutch Housing	0-3 Years	Unlimited	No Charge	No Charge
Frame Rails	0-3 Years 3-5 Years	Unlimited Unlimited	No Charge 50%	No Charge 50%
Cab Sheet Metal (Rust through)	0-5 Years	Unlimited	No Charge	No Charge
Cab Sheet Metal (Corrosion)	0-3 Years	Unlimited	No Charge	No Charge
Engine Emission Control System	0-5 Years	0-160,000	No Charge	No Charge
Tire	0-2 Years	0-38,400	No Charge	No Charge

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
The warranty coverages are limited by whichever occurs first.
See your authorized Isuzu dealer for warranty details.



NPR-HD Diesel



CREW CAB

GVWR/GCWR	14,500/20,500 lbs.
BODY/PAYLOAD ALLOWANCE	7,766-7,832 lbs.
GAWR Front Rear	5,360 lbs. 9,880 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY Ratio	11,020 lbs. 4.555
SUSPENSION F/R SPRINGS Capacity	Tapered/Multi-Leaf 6,830/9,880 lbs.
FRAME Section Modulus Resistance Bending Moment	11.89 in. ³ 523,160 lb.-ft./in.
SERVICE BRAKES Front/Rear	Vacuum/Hydraulic with 4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears
ENGINE Displacement Engine Power Engine Torque Oil Level Indicator	Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215 hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm Dash-mounted oil level check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	215/85R16E (10-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK Standard	30 gal. in-rail
FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light

NPR-XD Diesel

STANDARD CAB

GVWR/GCWR	16,000/22,000 lbs.
BODY/PAYLOAD ALLOWANCE	9,410-9,607 lbs.
GAWR	
Front	6,630 lbs.
Rear	11,020 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.
Ratio	4.777
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/14,308 lbs.
FRAME	
Section Modulus	7.20 in. ³
Resistance Bending Moment	316,800 lb.-ft./in.
SERVICE BRAKES	Vacuum/Hydraulic with
Front/Rear	4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears
ENGINE	Isuzu 4HK1-TC turbocharged intercooled diesel
Displacement	5.2L (317 in. ³)
Engine Power	215 hp @ 2,500 rpm
Engine Torque	452 lb.-ft. @ 1,850 rpm
Oil Level Indicator	Dash-mounted oil level check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5F (12-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-rail
Optional	33 gal. side mount (176" WB Only)
FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light

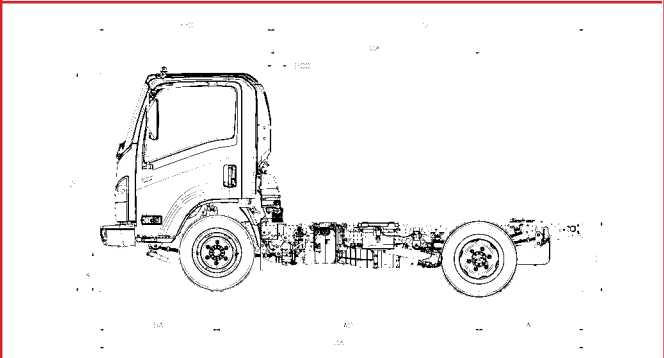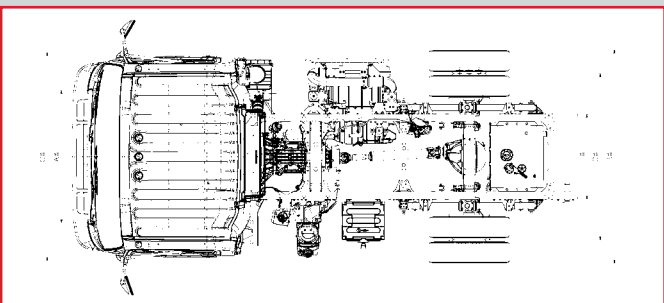

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (ft.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
109.0	86.5	129.6	7.7	200.5	10-12	81.3	65.6	92.4
132.5	110.0	153.1	7.7	224.0	14	81.3	65.6	92.4
150.0	127.5	170.6	7.7	241.5	16-18	81.3	65.6	92.4
176.0	153.5	196.6	7.7	267.5	18-20	81.3	65.6	92.4

2018 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE



Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle kilometers*	Parts	Labor
Basic	0-3 Years	Unlimited	No Charge	No Charge
Engine	0-3 Years	Unlimited	No Charge	No Charge
• Transmission • Drive Axle • Driveshaft • Front Axle I-Beam • Crossmembers • Flywheel Housing • Clutch Housing	0-3 Years	Unlimited	No Charge	No Charge
Frame Rails	0-3 Years 3-5 Years	Unlimited	No Charge 50%	No Charge 50%
Cab Sheet Metal (Rust through)	0-5 Years	Unlimited	No Charge	No Charge
Cab Sheet Metal (Corrosion)	0-3 Years	Unlimited	No Charge	No Charge
Engine Emission Control System	0-5 Years	0-160,000	No Charge	No Charge
Tire	0-2 Years	0-38,400	No Charge	No Charge

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
The warranty coverages are limited by whichever occurs first.
See your authorized Isuzu dealer for warranty details.

NPR-XD Diesel

CREW CAB

GVWR/GCWR	16,000/22,000 lbs.
BODY/PAYLOAD ALLOWANCE	8,840-8,905 lbs.
GAWR	
Front	6,630 lbs.
Rear	11,020 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.
Ratio	4.777
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/14,308 lbs.
FRAME	
Section Modulus	11.89 in. ³
Resistance Bending Moment	523,160 lb.-ft./in.
SERVICE BRAKES	Vacuum/Hydraulic with
Front/Rear	4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears
ENGINE	Isuzu 4HK1-TC turbocharged intercooled diesel
Displacement	5.2L (317 in. ³)
Engine Power	215 hp @ 2,500 rpm
Engine Torque	452 lb.-ft. @ 1,850 rpm
Oil Level Indicator	Dash-mounted oil level check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5F (12-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-rail
FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light

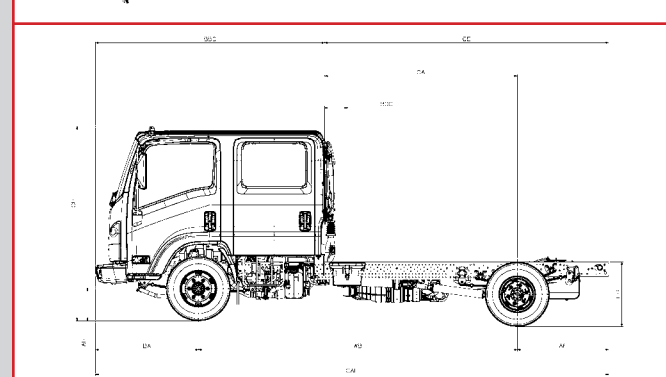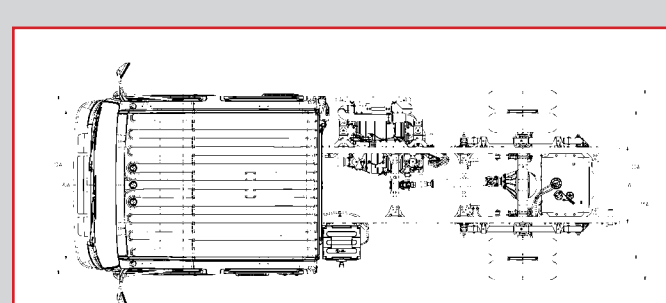

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (ft.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
150.0	88.5	131.6	5.3	241.5	12	81.3	65.6	92.4
176.0	114.5	157.6	5.3	267.5	16	81.3	65.6	92.4

2018 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle kilometers*	Parts	Labor
Basic	0-3 Years	Unlimited	No Charge	No Charge
Engine	0-3 Years	Unlimited	No Charge	No Charge
• Transmission • Drive Axle • Driveshaft • Front Axle I-Beam • Crossmembers • Flywheel Housing • Clutch Housing	0-3 Years	Unlimited	No Charge	No Charge
Frame Rails	0-3 Years 3-5 Years	Unlimited	No Charge 50%	No Charge 50%
Cab Sheet Metal (Rust through)	0-5 Years	Unlimited	No Charge	No Charge
Cab Sheet Metal (Corrosion)	0-3 Years	Unlimited	No Charge	No Charge
Engine Emission Control System	0-5 Years	0-160,000	No Charge	No Charge
Tire	0-2 Years	0-38,400	No Charge	No Charge



* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
The warranty coverages are limited by whichever occurs first.
See your authorized Isuzu dealer for warranty details.



NQR Diesel

STANDARD CAB

GVWR/GCWR	17,950/23,950 lbs.
BODY/PAYLOAD ALLOWANCE	10,939-11,461 lbs.
GAWR Front Rear	6,830 lbs. 12,980 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY Ratio	14,550 lbs. 5.125
SUSPENSION F/R SPRINGS Capacity	Tapered/Multi-Leaf 8,440/14,550 lbs.
FRAME Section Modulus Resistance Bending Moment	7.20 in. ³ 316,800 lb.-ft./in.
SERVICE BRAKES Front/Rear	Hydraulic Boosted with 4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears
ENGINE Displacement Engine Power Engine Torque Oil Level Indicator	Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215 hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm Dash-mounted oil level check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5F (12-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK Standard Optional	30 gal. in-rail 33 gal. side mount (176" WB Only)
FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light

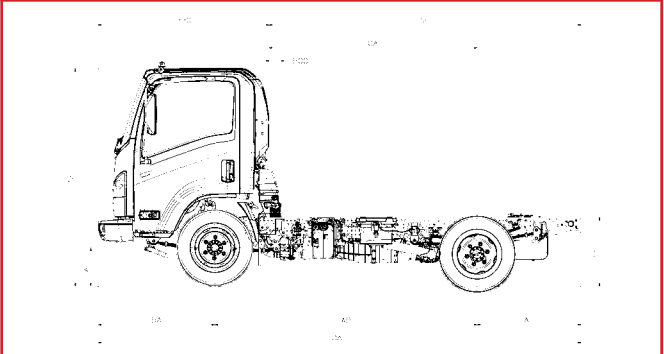
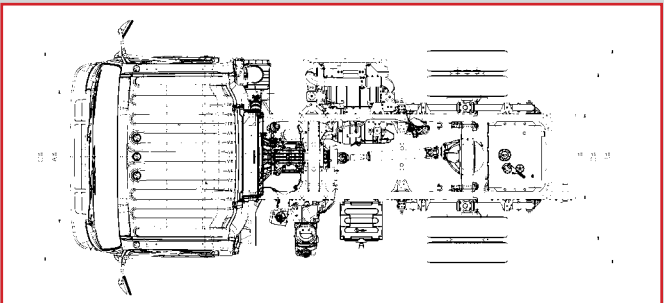


Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
109.0	86.5	129.6	7.7	200.5	10-12	81.3	65.6	92.4
132.5	110.0	153.1	7.7	224.0	14	81.3	65.6	92.4
150.0	127.5	170.6	7.7	241.5	16-18	81.3	65.6	92.4
176.0	153.5	196.6	7.7	267.5	18-20	81.3	65.6	92.4
200.0	177.5	220.6	7.7	291.5	22	81.3	65.6	92.4

2018 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle kilometres*	Parts	Labor
Basic	0-3 Years	Unlimited	No Charge	No Charge
Engine	0-3 Years	Unlimited	No Charge	No Charge
• Transmission • Drive Axle • Driveshaft • Front Axle I-Beam • Crossmembers • Flywheel Housing • Clutch Housing	0-3 Years	Unlimited	No Charge	No Charge
Frame Rails	0-3 Years 3-5 Years	Unlimited Unlimited	No Charge 50%	No Charge 50%
Cab Sheet Metal (Rust through)	0-5 Years	Unlimited	No Charge	No Charge
Cab Sheet Metal (Corrosion)	0-3 Years	Unlimited	No Charge	No Charge
Engine Emission Control System	0-5 Years	0-160,000	No Charge	No Charge
Tire	0-2 Years	0-38,400	No Charge	No Charge

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
The warranty coverages are limited by whichever occurs first.
See your authorized Isuzu dealer for warranty details.

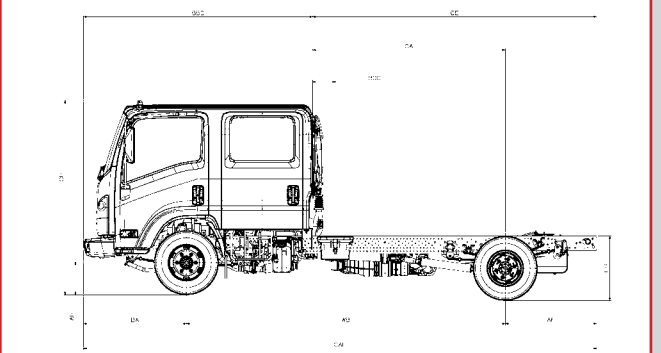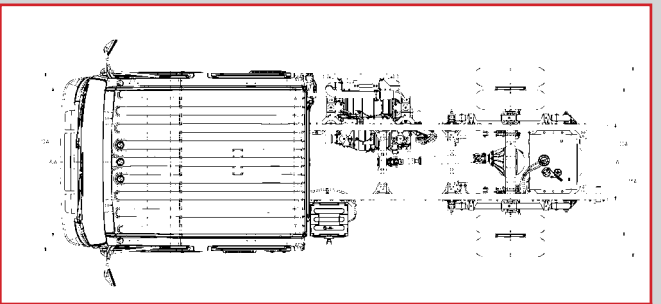

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (in.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
150.0	88.5	131.6	5.3	241.5	12	81.3	65.6	92.4
176.0	114.5	157.6	5.3	267.5	16	81.3	65.6	92.4

2018 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle kilometres*	Parts	Labor
Basic	0-3 Years	Unlimited	No Charge	No Charge
Engine	0-3 Years	Unlimited	No Charge	No Charge
• Transmission • Drive Axle • Driveshaft • Front Axle I-Beam • Crossmembers • Flywheel Housing • Clutch Housing	0-3 Years	Unlimited	No Charge	No Charge
Frame Rails	0-3 Years 3-5 Years	Unlimited Unlimited	No Charge 50%	No Charge 50%
Cab Sheet Metal (Rust through)	0-5 Years	Unlimited	No Charge	No Charge
Cab Sheet Metal (Corrosion)	0-3 Years	Unlimited	No Charge	No Charge
Engine Emission Control System	0-5 Years	0-160,000	No Charge	No Charge
Tire	0-2 Years	0-38,400	No Charge	No Charge

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date.
The warranty coverages are limited by whichever occurs first.
See your authorized Isuzu dealer for warranty details.

NQR Diesel

CREW CAB



GVWR/GCWR	17,950/23,950 lbs.
BODY/PAYLOAD ALLOWANCE	10,680-10,748 lbs.
GAWR Front Rear	6,830 lbs. 12,980 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY Ratio	14,550 lbs. 5.125
SUSPENSION F/R SPRINGS Capacity	Tapered/Multi-Leaf 8,440/14,550 lbs.
FRAME Section Modulus Resistance Bending Moment	11.89 in. ³ 523,160 lb.-ft./in.
SERVICE BRAKES Front/Rear	Hydraulic Boosted with 4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears
ENGINE Displacement Engine Power Engine Torque Oil Level Indicator	Isuzu 4HK1-TC turbocharged intercooled diesel 5.2L (317 in. ³) 215 hp @ 2,500 rpm 452 lb.-ft. @ 1,850 rpm Dash-mounted oil level check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5F (12-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK Standard	30 gal. in-rail
FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light



NRR Diesel

STANDARD CAB

GVWR/GCWR	19,500/25,500 lbs.
BODY/PAYLOAD ALLOWANCE	12,294-12,875 lbs.
GAWR	
Front	7,275 lbs.
Rear	13,660 lbs.
FRONT AXLE CAPACITY	7,275 lbs.
REAR AXLE CAPACITY	14,550 lbs.
Ratio	5.571
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	8,440/14,550 lbs.
FRAME	
Section Modulus	7.20 in. ³
Resistance Bending Moment	316,800 lb.-ft./in.
SERVICE BRAKES	Hydraulic Boosted with
Front/Rear	4-Channel ABS Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A465 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears
ENGINE	Isuzu 4HK1-TC turbocharged intercooled diesel
Displacement	5.2L (317 in. ³)
Engine Power	215 hp @ 2,500 rpm
Engine Torque	452 lb.-ft. @ 1,850 rpm
Oil Level Indicator	Dash-mounted oil level check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-Free 750-CCA
TIRES LRR (Low Rolling Resistance)	225/70R19.5F (12-pr) Standard
STEERING	Integral Hydraulic Power
STEERING COLUMN	Tilt and Telescopic
FUEL TANK	
Standard	30 gal. in-rail
Optional	33 gal. side mount (176" WB Only)
FUEL/WATER SEPARATOR	Dual fuel filter with dash mounted indicator light

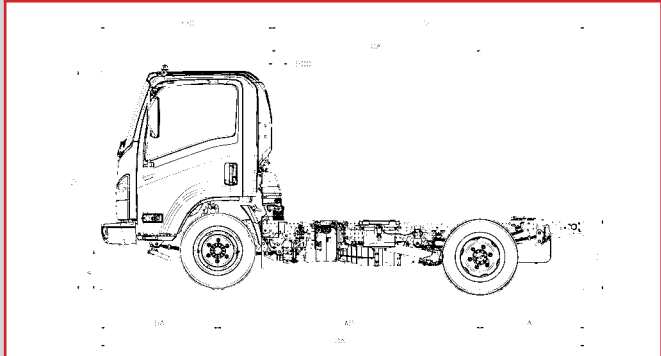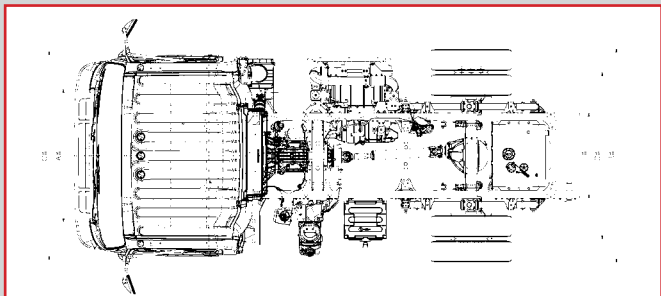

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)	Body Length (ft.)	Overall Width (in.)	Axle Width (in.)	Overall Height (in.)
109.0	86.5	129.6	7.7	200.5	10-12	81.3	65.6	92.4
132.5	110.0	153.1	7.7	224.0	14	81.3	65.6	92.4
150.0	127.5	170.6	7.7	241.5	16-18	81.3	65.6	92.4
176.0	153.5	196.6	7.7	267.5	18-20	81.3	65.6	92.4
200.0	177.5	220.6	7.7	291.5	22	81.3	65.6	92.4
212.0	189.5	232.6	7.7	303.5	24	81.3	65.6	92.4

2018 ISUZU N-SERIES DIESEL WARRANTY COVERAGE AT A GLANCE

Vehicle Coverage	Warranty Limitations (Time or Mileage, Whichever Comes First)*		Percentage Of Dealer's Normal Charge Paid By Owner	
	Time in years*	Vehicle kilometers*	Parts	Labor
Basic	0-3 Years	Unlimited	No Charge	No Charge
Engine	0-3 Years	Unlimited	No Charge	No Charge
• Transmission	0-3 Years	Unlimited	No Charge	No Charge
• Drive Axle				
• Driveshaft				
• Front Axle I-Beam				
• Crossmembers				
• Flywheel Housing	0-3 Years	Unlimited	No Charge	No Charge
• Clutch Housing				
Frame Rails	0-3 Years	Unlimited	No Charge	No Charge
	3-5 Years	Unlimited	50%	50%
Cab Sheet Metal (Rust through)	0-5 Years	Unlimited	No Charge	No Charge
Cab Sheet Metal (Corrosion)	0-3 Years	Unlimited	No Charge	No Charge
Engine Emission Control System	0-5 Years	0-160,000	No Charge	No Charge
Tire	0-2 Years	0-38,400	No Charge	No Charge

* The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. The warranty coverages are limited by whichever occurs first. See your authorized Isuzu dealer for warranty details.

Benefits of the Isuzu Low Cab Forward Design:

Compared to conventional cab trucks, vans and cutaways, the Isuzu Low Cab Forward design delivers:

- More cargo space available for body
 - Easier access to the engine compartment with the Isuzu tilt-cab design
 - Remarkable maneuverability with 49.5 degree wheel-cut angle for tighter turning
 - Driver-friendly entry and exit with 85 degree door swing, grab handles, and entry step
 - Outstanding driver visibility, see the ground within 8 ft. in front of truck
 - High rigidity cab for collision safety
 - Durable and dependable
 - Better fuel economy
 - GVWR range from 12,000 to 19,500 lbs.
 - Chassis configurations to handle bodies 10 to 24 feet
 - Multiple engine options: two diesel and one gas with CNG/LPG capability
 - Lower cost of ownership
- Learn more at your local Isuzu truck dealer.

3/4/5 CUSTOMER COVERAGE PROGRAM

- 3 Years Bumper to Bumper Warranty Coverage
- 4 Years/200,000 Kilometer No Charge Oil Changes and Segment Exclusive Health Reports
- 5 Years/280,000 Kilometer Diesel Truck Extended Warranty Plus Program

OVERVIEW OF THE ISUZU 4 YEAR / 200,000 Kilometer OIL CHANGE AND HEALTH REPORT

- This program is offered to retail and fleet customers and is administered by Isuzu Commercial Truck of Canada, Inc. (ICTC).
- This Program offer is only available for new 2018 Diesel N-Series and 2017 NPR models equipped with the 4J diesel engine.
- This program does not apply to either the Reach or Gas powered trucks.
- The program timing per oil change is every 300 hours or 16,000 Kilometers (plus or minus 2,000 Kilometers) and multiples of 16,000 Kilometers.

PROGRAM BENEFITS

- Significantly lowers cost of ownership.
- Provides owners with segment exclusive Health Report featuring fuel economy, acceleration and braking history, and advanced diagnostics information.
- Ensures consistent professional attention to your truck from the Isuzu dealer.

PROGRAM PERIOD

- Start Date: January 1st, 2017
- End Date: December 31, 2017

ICTC reserves the right to amend or revoke this program at any time without prior notice. ICTC reserves the right to audit Dealer records and disqualify any allowances paid under the Program Guidelines. ICTC will charge back to the Dealer any credits paid on ineligible units. ICTC reserves the right to take actions instead of or in addition to those set out in this paragraph. Final Decision in all matters relating to the interpretation and application of any rule or phase of this program, the decision of ICTC shall be final. ICTC also reserves the right to amend, change or revoke the program at any time due to reasonable business considerations or circumstances beyond its control.

