

# FAN & A/C ACCESSORIES

# MAJOR APPLIANCES **J**

In Section J:	Vacuum	Refrigerators & Acc.	Dishwasher	Ranges & Acc.	Washer/Dryer	Water Heaters	Furnace	Fans	Air Conditioners	Generators
---------------	--------	----------------------	------------	---------------	--------------	---------------	---------	------	------------------	------------



**PRIME PRODUCTS FANS**  
**HEAVY DUTY CHROME FAN**

All chrome, all metal fan with heavy duty 12-volt motor dresses up the interior of any RV. A 2-speed switch mounted on the base allows for convenient high-low, on-off operation.

**17336** HD Chrome Fan, 2-Speed  
 #06-0850 12

**6" OSCILLATING FAN**

90 degree oscillation or fixed operation with the flip of a switch. Also features adjustable tilt position and 60 piece chrome fan guard. Complete with wire, switch and mounting bracket for easy installation in a 12-volt system.

**17334** 6" Oscillating Fan #06-0600 12

2 Fan Speeds

**TABLE FAN**

Powerful pedestal mounted 8" table fan can also attach to a wall. Features include 90 degree oscillation, adjustable tilt position, 60 piece chrome grill guard, non slip rubber feet and 2 fan speeds. Plugs into standard 12-volt outlets. Cord length is 17 feet long.



**17335** 8" Oscillating Table Fan, Boxed  
 #06-0810 6

**ROADPRO**

**12V OSCILLATING METAL GRILLE**

- Plugs directly into your cigarette lighter socket.
- Spring loaded clamp for easy clip mount or permanent dash-mount includes hardware.
- 7' Power cord oscillating feature with fan up/down adjustment.
- Durable black metal grille.
- 15 Watts, 1.1 amp draw.



**12402** 12V Oscillating Auto Fan  
 #RP-1137 12




**ParkPower**  
 MARINCO

**MARINE QUALITY CABIN FAN**

Keeps air moving, defogs windows. Mounts vertically or horizontally. Efficient 12V, quiet 1.2 Amp motor. Three transparent blades with 7 1/2" diameter vinyl coated guard. 120° oscillation.

**749398** Cabin Fan #900 6

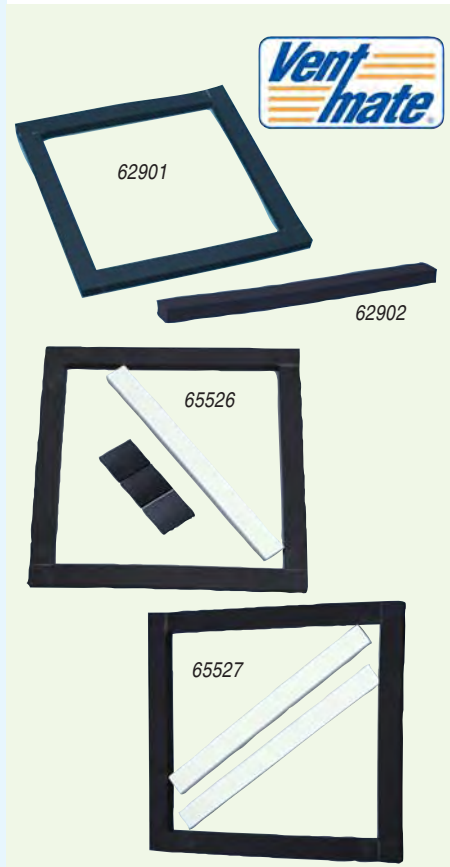

**VENTMATE AIR CONDITIONER GASKETS**

For a perfect air conditioner installation. Corners are presealed for water tight integrity.

**AIR CONDITIONER GASKET, 14" x 14"**

**62901** Sealed Gasket for Air Conditioners  
 #40111 18


**AIR CONDITIONER ADHESIVE STRIP FOAM**

For a perfect air conditioner installation. 16"L x 1 1/2"W x 3/4"H.

**62902** Adhesive Strip Foam #40112 1

**GASKET KITS FOR COLEMAN A/Cs**

**65526** 14" x 14" #41208 1  
**65527** 14" x 16" #41209 1

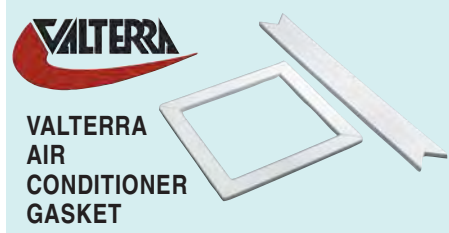

**VALTERRA AIR CONDITIONER GASKET**

An economic universal gasket for air conditioners to fit a 14" x 14" opening. This gasket is not recommended for Coleman air conditioners.

**63829** A/C Seal #A10-1414 10



**RVP REPLACEMENT SHROUDS for Coleman®-Mach® Air Conditioners**

**"D" SERIES SHROUD**

Fits the "D" Series of A/Cs. Horizontal vents and no decals or embossing. Works on all 8000 model series A/Cs as well as all 7000 models. Co-polymer polypropylene material is paintable. Better UV protection. As good or better impact resistant. Strong 2-piece inter-lock construction. Smaller footprint on roof.

D-Series Shroud, 13.5" x 26" x 37":

**66578** Arctic White #8335A5261 12

**MINI-MACH SHROUD**

Coleman-Mach Shroud for Mini-Mach:

**60827** Arctic White #6727-3761 1

**ARCON AIR CONDITIONER WIRING KIT FOR COLEMAN TENT TRAILERS**



Designed for use on A/C ready tent trailers. Kit includes 25' heavy-duty 20 amp white vinyl power cord with right angle 20 amp plug, cable mounting hardware and velcro straps.



**65141** Tent Camper A/C Hard Wire Kit #65141 1

6 = Std. Carton Qty.



**RV Products Air Conditioners  
Coleman®-Mach® 480x4 Series  
HEAT PUMP**

Heat and cold



**HP2™  
HIGH PERFORMANCE HEAT PUMP**

**NOW CHARGED WITH (ECO-FRIENDLY) R-410A**

Air conditions your RV with a whopping 15,000 nominal BTUH cooling capacity. Economically heats your RV also, with 12,700 BTUHs of available heat. A back-up electric heat strip provides additional heat for those extra chilly mornings. HP2 provides electric heat to use in moderate temperatures; lets you save your LP gas furnace for the really cold conditions. Copper tubing is rifled inside to create turbulence in the coolant, enhancing the system's ability to dissipate heat.

SPECIFICATIONS	HP2™ Heat Pump 480X4
Cooling Capacity (Nominal BTUH)	15,000
Locked Rotor Cooling Amps	63.0
Running Watts/Cooling (1)	1,640
Running Watts/Cooling (2)	1,960
Running Watts/Heating (3)	1,800
Electrical Rating	115V 60HZ 1 Phase
Delivered BTU Heating Output*	5,600
Approximate Full-Load Amps:	
Cooling	15.5
Heating	15.4*
Evaporator Air Delivery CFM	320 CFM-High Speed
Unit Weight (lbs)**	89.0
Dimensions (Exterior Shroud)	13.8" H x 26.1" Wx 38" L

\* Optional Heater Assembly. \*\*Installed weight will vary with Ceiling Package option. (1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC. (2) Cooling A.R.I. Standard Conditioning 95° F. DB/71° F. WB Indoor, 115° F. DB Outdoor at 103.5VAC. (3) 47° F. Outdoor Temperature (Optional Heat Strip Only).

**HP2™ HEAT PUMP AIR CONDITIONER COMPONENTS**

**Step 1, One Upper Unit, Required for All Configurations:**

**63150** Upper Unit Only, White #48004-876 **1**

**Step 2, One Air Distribution Box (ADB)**

*Required for NON-DUCTED Ceiling Configurations Only:*

**63147** Heat-Cool ADB, White #9530E715 **1**

**OR, Step 2, Both Required for lateral DUCTED Configurations Only:**

**63148** Lateral Ducted ADB, White #8530B735 **1**

**65659** Thermostat for Heat Pump

*(Refer to page 255 for more details)* #8530A3451 **1**

**Step 3, Options for HP2 Heat Pump Air Conditioner:**

**60403** Solar Pal Charger, 5 Watts #7330A4101 **1**

*Replacement Filter:*

**66567** For Non-Ducted 7330/8330 Series #6703-3302 **24**

**60962** For Ducted #6798A3761 **100**

**65490** 16" x 16" (Ducted Ceiling used on most Fleetwood Units) #6798-3751 **25**

**POPULAR OPTION:  
SOLAR-PAL™  
RV BATTERY  
REPLENISHER**

**ENERGIZED!**

Prevents expensive auxiliary battery replacement. Converts solar energy into a continuously feeding source of fresh charge for your battery. Attaches easily to any full-sized Coleman®-Mach® RV air conditioner. Reduces freeze damage. Self-regulating to prevent overcharging.



**60403** Solar Pal Charger #7330A4101 **1**





## RV Products Air Conditioners Coleman®-Mach® 48203A8765 Series ROUGHNECK

### ROUGHNECK — IT'S TOUGH!

NOW CHARGED WITH (ECO-FRIENDLY) R-410A

Takes you where no road has gone before. Specially equipped to handle the jarring and vibrations that come with the territory, whether you're in construction, the oil field, or just taking the back roads to your favorite fishing hole. Tough enough to beat the heat, too, with a 13,500 BTUH nominal cooling capacity.



SPECIFICATIONS	ROUGHNECK 48203A8765
Cooling Capacity (Nominal BTUH)	13,500
Locked Rotor Cooling Amps	63.0
Running Watts/Cooling (1)	1,650
Running Watts/Cooling (2)	1,900
Running Watts/Heating (3)	1,800
Electrical Rating	115V 60HZ 1 Phase
Delivered BTU Heating Output*	5,600
Approximate Full-Load Amps:	
Cooling	15.3
Heating	16.0*
Evaporator Air Delivery CFM	320 CFM-High Speed
Unit Weight (lbs)**	85.5
Dimensions (Exterior Shroud)	13.8" H x 26.1" W x 38" L
* Optional Heater Assembly. ** Installed weight will vary with Ceiling Package option. (1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC. (2) Cooling A.R.I. Standard Conditioning 95° F. DB/71° F. WB Indoor, 115° F. DB Outdoor at 103.5VAC. (3) 47° F. Outdoor Temperature.	

#### ROUGHNECK AIR CONDITIONER COMPONENTS

**Step 1, One Upper Unit, Required for All Configurations:**

**63146** Upper Unit Only, White #48203A8765 ◆**1**

**Step 2, One Air Distribution Box (ADB)**

Required for NON-DUCTED Ceiling Configurations Only:

**67305** Cool-Only ADB Only, White #9330E715 **1**

**67306** Electric Heat Kit f/67305 #9233-4551 **1**

**OR, Step 2, One ADB Required for lateral DUCTED Configurations Only:**

**63130** Cool-Only ADB, White, w/o Thermostat #8330A733 **1**

**65192** Heat/Cool ADB, White, w/o Thermostat #8330B735 **1**

**60277** Thermostat, Wall-Mount #7330G3351 **1**

**64444** MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required) #8330-763 **1**

**OR, Step 2, One ADB Required for Ducted PARK MODELS Only:**

**63126** Cool Only ADB, 24-V, w/o Thermostat #8330A743 **1**

**64680** Thermostat, Standard 24-V #7330B3441 **1**

**Step 3, Options for Roughneck Air Conditioner:**

**60403** Solar Pal Charger #7330A4101 **1**

Replacement Filter:

**66567** For Non-Ducted 7330/8330 Series #6703-3302 **24**

**60962** For Ducted #6798A3761 **100**

**65490** 16" x 16" (Ducted Ceiling used on most Fleetwood Units) #6798-3751 **25**







**RV Products Air Conditioners  
Coleman®-Mach® 48204 Series  
MACH 15**



**MACH 15™  
RV AIR CONDITIONER**

**NOW CHARGED WITH (ECO-FRIENDLY) R-410A  
DELIVERS THE HIGHEST AIRFLOW RATE AVAILABLE.**

No matter what you're driving, we've got your air conditioner. Want to take cooling power to the max? The Mach 15™ is the world's most powerful RV air conditioner with the highest cooling output you can buy. With an airflow so strong, it's a sure bet for ducted systems. The Mach 15™ is equipped with a 1/3 hp fan motor, the largest used in an RV A/C, delivering cool air at an incredible 320 CFM (cubic feet per minute). And the Mach 15™ features the same streamlined shape that enhances the airflow and cooling efficiency of every model in the line of Coleman®-Mach® RV air conditioners. All-copper tubing & gas-flux brazed joints ensure long life product dependability. Large evaporator & condenser coils with raised lance fins enhance the system's ability to dissipate heat. A/C shroud includes condenser coil protection. Optional heater assembly can be added to provide 5,600 BTUH of heat.

\* Optional Heater Assembly.  
\*\* Installed weight will vary with Ceiling Package option.  
(1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC.  
(2) Cooling A.R.I. Standard Conditioning 95° F. DB/71° F. WB Indoor, 115° F. DB Outdoor at 103.5VAC.  
(3) 47° F. Outdoor Temperature.



SPECIFICATIONS	MACH 15 48204
Cooling Capacity (Nominal BTUH)	15,000
Locked Rotor Cooling Amps	63.0
Running Watts/Cooling (1)	1,650
Running Watts/Cooling (2)	1,900
Running Watts/Heating (3)	1,800
Electrical Rating	115V 60HZ 1 Phase
Delivered BTU Heating Output*	5,600
Approximate Full-Load Amps:	
Cooling	15.3
Heating	16.0*
Evaporator Air Delivery CFM	320 CFM-High Speed
Unit Weight (lbs)**	79.5
Dimensions (Exterior Shroud)	13.8" H x 26.1" W x 38" L

**MACH 15 AIR CONDITIONER COMPONENTS**

**Step 1, One Upper Unit, Required for All Configurations:**

**63140** Upper Unit Only, White #48204A876 **◆ 1**

**Step 2, One Air Distribution Box (ADB)**

*Required for NON-DUCTED Ceiling Configurations Only:*

**67305** Cool-Only ADB Only, White #9330E715 **1**

**67306** Electric Heat Kit f/67305 #9233-4551 **1**

**OR, Step 2, for Non-Ducted Ceiling Configuration with Wall Thermostat (Plenum plus Thermostat plus Either Control Package Required):**

**65344** Plenum for Wall Thermostat, White #9330E4552 **1**

**60277** Wall Thermostat #7330G3351 **1**

**65346** Cool-Only Control Package #8330-752 **1**

**65345** Heat-Cool Control Package #9330A755 **1**

**OR, Step 2, One ADB Required for lateral DUCTED Configurations Only:**

**63130** Cool-Only ADB, White, w/o Thermostat #8330A733 **1**

**65192** Heat/Cool ADB, White, w/o Thermostat #8330B735 **1**

**60277** Thermostat, Wall-Mount #7330G3351 **1**

**64444** MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required) #8330-763 **1**

**OR, Step 2, One ADB Required for Ducted PARK MODELS Only:**

**63126** Cool Only ADB, 24-V, w/o Thermostat #8330A743 **1**

**64680** Thermostat, Standard 24-V #7330B3441 **1**

**Step 3, Options for Mach 15 Air Conditioner:**

**60403** Solar Pal Charger #7330A4101 **1**

**60387** <sup>LS</sup> Add-On Heat Strip for Non-Ducted Cool-Only 7330/8330 Series #7330A7361 **1**

**65348** Add-On Heat Strip for Non-Ducted Cool only 9330X713 Series #9330A6151 **1**

**Replacement Filter:**

**66567** For Non-Ducted 7330/8330 Series #6703-3302 **24**

**65354** For Non-Ducted 9330Series #9330-3151 **1**

**60962** For Ducted #6798A3761 **100**

**65490** 16" x 16" (Ducted Ceiling used on most Fleetwood Units) #6798-3751 **25**



## RV Products Air Conditioners Coleman®-Mach® 48203 Series MACH 3 PLUS

SPECIFICATIONS	MACH 3+ 48203
Cooling Capacity (Nominal BTUH)	13,500
Locked Rotor Cooling Amps	63.0
Running Watts/Cooling (1)	1,650
Running Watts/Cooling (2)	1,900
Running Watts/Heating (3)	1,800
Electrical Rating	115V 60HZ 1 Phase
Delivered BTU Heating Output*	5,600
Approximate Full-Load Amps:	
Cooling	15.3
Heating	16.0*
Evaporator Air Delivery CFM	320 CFM-High Speed
Unit Weight (lbs)**	79.5
Dimensions (Exterior Shroud)	13.8" H x 26.1" W x 38" L

### MACH 3+ AIR CONDITIONER COMPONENTS

**Step 1, One Upper Unit, Required for All Configurations:**

**63134** Upper Unit Only, White #48203A876 **◆1**

**Step 2, One Air Distribution Box (ADB)**

*Required for NON-DUCTED Ceiling Configurations Only:*

**67305** Cool-Only ADB Only, White #9330E715 **1**

**67306** Electric Heat Kit f/67305 #9233-4551 **1**

**OR, Step 2, for Non-Ducted Ceiling Configuration with Wall Thermostat (Plenum plus Thermostat plus Either Control Package Required):**

**65344** Plenum for Wall Thermostat, White #9330E4552 **1**

**60277** Thermostat, Wall-Mount #7330G3351 **1**

**65346** Cool-Only Control Package #8330-752 **1**

**65345** Heat-Cool Control Package #9330A755 **1**

**OR, Step 2, One ADB Required for lateral DUCTED Configurations Only:**

**63130** Cool-Only ADB, White, w/o Thermostat #8330A733 **1**

**65192** Heat/Cool ADB, White, w/o Thermostat #8330B735 **1**

**60277** Thermostat, Wall-Mount #7330G3351 **1**

**64444** MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required) #8330-763 **1**

**OR, Step 2, One ADB Required for Ducted PARK MODELS Only:**

**63126** Cool Only ADB, 24-V, w/o Thermostat #8330A743 **1**

**64680** Thermostat, Standard 24-V #7330B3441 **1**

**Step 3, Options for Mach 3+ Air Conditioner:**

**60403** Solar Pal Charger #7330A4101 **1**

**60387** <sup>LS</sup> Add-On Heat Strip for Non-Ducted Cool-Only 7330/8330 Series #7330A7361 **1**

**65348** Add-On Heat Strip for Non-Ducted Cool only 9330X713 Series #9330A6151 **1**

*Replacement Filter:*

**66567** For Non-Ducted 7330/8330 Series #6703-3302 **24**

**65354** For Non-Ducted 9330Series #9330-3151 **1**

**60962** For Ducted #6798A3761 **100**

**65490** 16" x 16" (Ducted Ceiling used on most Fleetwood Units) #6798-3751 **25**



### MACH 3 PLUS AIR CONDITIONER

**NOW CHARGED WITH (ECO-FRIENDLY) R-410A**

- America's over-the-road bestseller.
- As the second most powerful air conditioner in the Coleman®-Mach® line, the Mach 3 PLUS™ is one of the best RV air conditioning values available.
- The Mach 3 PLUS™ features a large evaporator and condenser coils with raised lance fins to help dissipate heat. 13,500 nominal BTUH cooling capacity; delivers 320 CFM (cubic feet per minute) airflow.
- Add the optional Heater Assembly and you'll have 5,600 BTUHs of heat for cooler outings.
- You can count on the Mach 3 PLUS™ for reliability too. All-copper tubing and gas-flux brazed joints ensure durability and long life for your RV air conditioner.
- A/C shroud includes condenser coil protection.

\* Optional Heater Assembly.

\*\* Installed weight will vary with Ceiling Package option.

(1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC.

(2) Cooling A.R.I. Standard Conditioning 95° F. DB/71° F. WB Indoor, 115° F. DB Outdoor at 103.5VAC.

(3) 47° F. Outdoor Temperature.







**RV Products Air Conditioners  
Coleman®-Mach® 48207 Series  
MACH I POWER SAVER**



\* Optional Heater Assembly.  
\*\*Installed weight will vary with Ceiling Package option.  
(1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC.  
(2) Cooling A.R.I. Desert Condition 100° F. DB/72° F. WB Indoor, 120° F. DB Outdoor at 103.5VAC.  
(3) 47° F. Outdoor Temperature.

**MACH I POWER SAVER  
RV AIR CONDITIONER**

**NOW CHARGED WITH (ECO-FRIENDLY) R-410A**

- If a little less power will do just fine, consider the Mach I Power Saver.
- With a compressor rating of 11,000 nominal BTUH, it works well with smaller generators because of its lower amp draw.

**9000 SERIES  
CEILINGASSEMBLY  
("Air Distribution  
Box (ADB)")**

Order with most Coleman-Mach air conditioner upper units. (Example: Cool-only models **67305** White.) Control knobs mounted on end for best visibility and ease of operation. Designed with a special contour to fit snugly against convex vehicle ceilings. Only two inches thick and weighs just over 6 pounds. Filter replacement is convenient and easy to perform.



SPECIFICATIONS	MACH I POWER SAVER 48207
Cooling Capacity (Nominal BTUH)	11,000
Locked Rotor Cooling Amps	45.6
Running Watts/Cooling (1)	1,080
Running Watts/Cooling (2)	1,340
Running Watts/Heating (3)	1,750
Electrical Rating	115V 60HZ 1 Phase
Delivered BTU Heating Output*	5,600
Approximate Full-Load Amps:	
Cooling	9.9
Heating	15.6*
Evaporator Air Delivery CFM	320 CFM-High Speed
Unit Weight (lbs)**	83.5
Dimensions (Exterior Shroud)	13.8" H x 26.1" W x 38" L

**MACH I POWER SAVER 9632 AIR CONDITIONER COMPONENTS**

**Step 1, One Upper Unit, Required for All Configurations:**  
**63151** Upper Unit Only, White #48207A876 **◆1**

**Step 2, One Air Distribution Box (ADB)**  
*Required for NON-DUCTED Ceiling Configurations Only:*

- 67305** Cool-Only ADB Only, White #9330E715 **1**
- 67306** Electric Heat Kit f/67305 #9233-4551 **1**

**OR, Step 2, for Non-Ducted Ceiling Configuration with Wall Thermostat (Plenum plus Thermostat plus Either Control Package Required):**

- 65344** Plenum for Wall Thermostat, White #9330E4552 **1**
- 60277** Thermostat, Wall-Mount #7330G3351 **1**
- 65346** Cool-Only Control Package #8330-752 **1**
- 65345** Heat-Cool Control Package #9330A755 **1**

**OR, Step 2, One ADB Required for lateral DUCTED Configurations Only:**

- 63130** Cool-Only ADB, White, w/o Thermostat #8330A733 **1**
- 65192** Heat/Cool ADB, White, w/o Thermostat #8330B735 **1**
- 60277** Thermostat, Wall-Mount #7330G3351 **1**

**64444** MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required) #8330-763 **1**

**OR, Step 2, One ADB Required for Ducted PARK MODELS Only:**

- 63126** Cool Only ADB, 24-V, w/o Thermostat #8330A743 **1**
- 64680** Thermostat, Standard 24-V #7330B3441 **1**

**Step 3, Options for Mach I Power Saver 8632 Air Conditioner:**

- 60403** Solar Pal Charger #7330A4101 **1**
- 60387** <sup>LS</sup> Add-On Heat Strip for Non-Ducted Cool-Only 7330/8330 Series #7330A7361 **1**
- 65348** Add-On Heat Strip for Non-Ducted Cool only 9330X713 Series #9330A6151 **1**

*Replacement Filter:*

- 66567** For Non-Ducted 7330/8330 Series #6703-3302 **24**
- 65354** For Non-Ducted 9330Series #9330-3151 **1**
- 60962** For Ducted #6798A3761 **100**
- 65490** 16" x 16" (Ducted Ceiling used on most Fleetwood Units) #6798-3751 **25**



## Coleman-Mach® RV Products Air Conditioners Coleman®-Mach® 48208 Series MACH III POWER SAVER

SPECIFICATIONS	MACH III POWER SAVER 48208
Cooling Capacity (Nominal BTUH)	13,500
Locked Rotor Cooling Amps	58.4
Running Watts/Cooling (1)	1,190
Running Watts/Cooling (2)	1,440
Running Watts/Heating (3)	1,750
Electrical Rating	115V 60HZ 1 Phase
Delivered BTU Heating Output*	5,600
Approximate Full-Load Amps:	
Cooling	11.2
Heating	15.6*
Evaporator Air Delivery CFM	320 CFM-High Speed
Unit Weight (lbs)**	83.5
Dimensions (Exterior Shroud)	13.8" H x 26.1" W x 38" L

### MACH III POWER SAVER AIR CONDITIONER COMPONENTS

**Step 1, One Upper Unit, Required for All Configurations:**

**63152** Upper Unit Only, White #48208-876 **◆ 1**

**Step 2, One Air Distribution Box (ADB)**

Required for NON-DUCTED Ceiling Configurations Only:

**67305** Cool-Only ADB Only, White #9330E715 **1**

**67306** Electric Heat Kit f/67305 #9233-4551 **1**

**OR, Step 2, for Non-Ducted Ceiling Configuration with Wall Thermostat (Plenum plus Thermostat plus Either Control Package Required):**

**65344** Plenum for Wall Thermostat, White #9330E4552 **1**

**60277** Thermostat, Wall-Mount #7330G3351 **1**

**65346** Cool-Only Control Package #8330-752 **1**

**65345** Heat-Cool Control Package #9330A755 **1**

**OR, Step 2, One ADB Required for lateral DUCTED Configurations Only:**

**63130** Cool-Only ADB, White, w/o Thermostat #8330A733 **1**

**65192** Heat/Cool ADB, White, w/o Thermostat #8330B735 **1**

**60277** Thermostat, Wall-Mount #7330G3351 **1**

**64444** MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required) #8330-763 **1**

**OR, Step 2, One ADB Required for Ducted PARK MODELS Only:**

**63126** Cool Only ADB, 24-V, w/o Thermostat #8330A743 **1**

**64680** Thermostat, Standard 24-V #7330B3441 **1**

**Step 3, Options for Mach III Power Saver Air Conditioner:**

**60403** Solar Pal Charger #7330A4101 **1**

**60387** <sup>LS</sup> Add-On Heat Strip for Non-Ducted Cool-Only 7330/8330 Series #7330A7361 **1**

**65348** Add-On Heat Strip for Non-Ducted Cool only 9330X713 Series #9330A6151 **1**

Replacement Filter:

**66567** For Non-Ducted 7330/8330 Series #6703-3302 **24**

**65354** For Non-Ducted 9330 Series #9330-3151 **1**

**60962** For Ducted #6798A3761 **100**

**65490** 16" x 16" (Ducted Ceiling used on most Fleetwood Units) #6798-3751 **25**



### MACH III POWER SAVER 100% Cool—27% Less Power!

NOW CHARGED WITH (ECO-FRIENDLY) R-410A

- Uses less power, so there's more electricity for your other appliances.
- But here's the real shocker: it actually delivers more cooling than a standard 13,500 BTUH air conditioner.
- Even starts in severe desert conditions, when many other RV A/Cs won't.

\* Optional Heater Assembly.

\*\* Installed weight will vary with Ceiling Package option.

(1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC.

(2) Cooling A.R.I. Standard Conditioning 95° F. DB/71° F. WB Indoor, 115° F. DB Outdoor at 103.5VAC.

(3) 47° F. Outdoor Temperature.







RV Products Air Conditioners  
Coleman®-Mach®  
POLAR MACH Series

POLAR MACH™

Large 17" fan moves more air over the oversized coil.

Hail guard shroud protects the coil.



Low profile for better aerodynamics

COLEMAN®-MACH® QUALITY  
HIGH PERFORMANCE, LOW PROFILE  
POLAR MACH RV AIR CONDITIONER

NOW CHARGED WITH (ECO-FRIENDLY) R-410A

The revolutionary low profile air conditioner series that utilizes the latest air conditioning technology. Environmental chamber testing has documented the Polar Series offers the best cooling capacity versus power consumption performance ever supplied to the RV industry. Aerodynamically styled air conditioner shrouds include weather resistant condenser coil protection. Heat transfer to the vehicle exterior has been dramatically accelerated by the vertically mounted motor and 17" oversized fan blade. **More Cooling—Less Power!** The quiet horizontal rotary compressor is the heart of the Polar's refrigeration system. Refrigeration circuit tubing has been rifled and cross-hatched internally to create turbulence in the refrigerant, improving the system's ability to dissipate heat. Electrical compressor starting components are standard equipment. At 1/3 hp, the motor is the most powerful in the RV industry and features a fan canopy to protect against damage from the elements. High-density polyethylene condensate water collection pan prevents corrosion problems. Durable molded polycarbonate fan guard has been impact tested to 40° below zero for reliability.

SPECIFICATIONS	CDS#65379	CDS#60087
Cooling Capacity (Nominal BTUH)	13,500	15,000
Locked Rotor Cooling Amps	63	
Running Watts/Cooling (1)	1,650	1,650
Running Watts/Cooling (2)	1,960	2,050
Running Watts/Heating (3)	1,800	
Electrical Rating	115V 60HZ 1 Phase	
Delivered BTU Heating Output*	5,600	
Approximate Full-Load Amps:	15.5	15.9
	Cooling 16.0	Heating 16.4
Evaporator Air Delivery CFM	320 CFM	310 CFM
Unit Weight (lbs)**	95.0	
Dimensions (Exterior Shroud)	10.63" H x 30.25" W x 44" L	

\* Optional Heater Assembly.  
\*\* Installed weight will vary with Ceiling Package option.  
(1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC.  
(2) Cooling A.R.I. Standard Conditioning 95° F. DB/71° F. WB Indoor, 115° F. DB Outdoor at 103.5VAC.  
(3) 47° F. Outdoor Temperature.

POLAR MACH AIR CONDITIONER COMPONENTS

**Step 1, One Upper Unit, Required for All Configurations:**

- 65379** 13,500 BTUH, White #49203A876 **◆1**
- 60087** **NEW!** 15,000 BTUH, White #49204A876 **◆1**

**Step 2, One Air Distribution Box (ADB) Required for NON-DUCTED Ceiling Configurations Only:**

- 67305** Cool-Only ADB Only, White #9330E715 **1**
- 67306** Electric Heat Kit 1/67305 #9233-4551 **1**
- OR, Step 2, for Non-Ducted Ceiling Configuration w/Wall Thermostat (Plenum + Thermostat + Either Control Package Required):**
- 65344** Plenum for Wall Thermostat, White #9330E4552 **1**
- 60277** Thermostat, Wall-Mount #7330G3351 **1**
- 65346** Cool-Only Control Package #8330-752 **1**
- 65345** Heat-Cool Control Package #9330A755 **1**

**OR, Step 2, One ADB Required for lateral DUCTED Configurations Only:**

- 63130** Cool-Only ADB, White, w/o Thermostat #8330A733 **1**
- 65192** Heat/Cool ADB, White, w/o Thermostat #8330B735 **1**
- 60277** Thermostat, Wall-Mount #7330G3351 **1**
- 64444** MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required) #8330-763 **1**
- OR, Step 2, One ADB Required for Ducted PARK MODELS Only:**
- 63126** Cool Only ADB, 24-V, w/o Thermostat #8330A743 **1**
- 64680** Thermostat, Standard 24-V #7330B3441 **1**

**Step 3, Options for Polar Mach Air Conditioner:**

- 65348** Add-On Heat Strip for Non-Ducted Cool only 9330X713 Series #9330A6151 **1**
- 69235** Replacement Shroud for C/D Models White #9203-5261 **1**
- Replacement Filter:
- 65354** For Non-Ducted 9330Series #9330-3151 **1**
- 60962** For Ducted #6798A3761 **100**







## RV Products Air Conditioners Coleman®-Mach® 49201 Series POLAR CUB

SPECIFICATIONS	POLAR CUB 49201
Cooling Capacity (Nominal BTUH)	9,200
Locked Rotor Cooling Amps	58.4
Running Watts/Cooling (1)	1,225
Running Watts/Cooling (2)	1,450
Running Watts/Heating (3)	1,750
Electrical Rating	115V 60HZ 1 Phase
Delivered BTU Heating Output*	5,600
Approximate Full-Load Amps:	
Cooling	11.5
Heating	13.75*
Evaporator Air Delivery CFM	200 CFM-High Speed
Unit Weight (lbs)**	89.5
Dimensions (Exterior Shroud)	10.63" x 30.25" x 44"

\* Optional Heater Assembly.  
 \*\* Installed weight will vary with Ceiling Package option.  
 (1) Cooling A.R.I. Standard Conditioning 80° F. DB/67° F. WB Indoor, 95° F. DB Outdoor at 115VAC.  
 (2) Cooling A.R.I. Standard Conditioning 95° F. DB/71° F. WB Indoor, 115° F. DB Outdoor at 103.5VAC.  
 (3) 47° F. Outdoor Temperature.

### POLAR CUB AIR CONDITIONER COMPONENTS

**Step 1, One Upper Unit, Required for All Configurations:**

**65381** Upper Unit Only, White #49201A876 **◆1**

**Step 2, One Air Distribution Box (ADB) Required for NON-DUCTED Ceiling Configurations Only:**

**67305** Cool-Only ADB Only, White #9330E715 **1**

**67306** Electric Heat Kit 1/67305 #9233-4551 **1**

**OR, Step 2, for Non-Ducted Ceiling Configuration w/Wall Thermostat (Plenum + Thermostat + Either Control Package Required):**

**65344** Plenum for Wall Thermostat, White #9330E4552 **1**

**60277** Thermostat, Wall-Mount #7330G3351 **1**

**65346** Cool-Only Control Package #8330-752 **1**

**65345** Heat-Cool Control Package #9330A755 **1**

**OR, Step 2, One ADB Required for lateral DUCTED Configurations Only:**

**63130** Cool-Only ADB, White, w/o Thermostat #8330A733 **1**

**65192** Heat/Cool ADB, White, w/o Thermostat #8330B735 **1**

**60277** Thermostat, Wall-Mount #7330G3351 **1**

**64444** MCD (Manual Control Ducted) ADB, Cool-Only, White (no thermostat required) #8330-763 **1**

**OR, Step 2, One ADB Required for Ducted PARK MODELS Only:**

**63126** Cool Only ADB, 24-V, w/o Thermostat #8330A743 **1**

**64680** Thermostat, Standard 24-V #7330B3441 **1**

**Step 3, Options for Polar Cub Air Conditioner:**

**65348** Add-On Heat Strip for Non-Ducted Cool only 9330X713 Series #9330A6151 **1**

**69235** Replacement Shroud for C/D Models White #9203-5261 **1**

Replacement Filter:

**65354** For Non-Ducted 9330Series #9330-3151 **1**

**60962** For Ducted #6798A3761 **100**



Large 17" fan moves more air over the oversized coil.

Hail guard shroud protects the coil.



Low profile for better aerodynamics

### COLEMAN®-MACH® QUALITY HIGH PERFORMANCE, LOW PROFILE POLAR MACH RV AIR CONDITIONER

NOW CHARGED WITH (ECO-FRIENDLY) R-410A

The revolutionary low profile air conditioner series that utilizes the latest air conditioning technology. Environmental chamber testing has documented the Polar Series offers the best cooling capacity versus power consumption performance ever supplied to the RV industry. Aerodynamically styled air conditioner shrouds include weather resistant condenser coil protection. Heat transfer to the vehicle exterior has been dramatically accelerated by the vertically mounted motor and 17" oversized fan blade. **More Cooling—Less Power!** The quiet horizontal rotary compressor is the heart of the Polar's refrigeration system. Refrigeration circuit tubing has been rifled and cross-hatched internally to create turbulence in the refrigerant, improving the system's ability to dissipate heat. Electrical compressor starting components are standard equipment. At 1/3 hp, the motor is the most powerful in the RV industry and features a fan canopy to protect against damage from the elements. High-density polyethylene condensate water collection pan prevents corrosion problems. Durable molded polycarbonate fan guard has been impact tested to 40° below zero for reliability.





Cool off your RV fast



For Ducted  
*Coleman-Mach*  
RV Air Conditioners

Replacement Ceiling Assembly

Exclusive Direct-Flow Louver System provides cool air where you need it for personalized comfort in any RV!

- OPEN the specially designed louvers to channel cool air straight down into the cabin.
- CLOSE the louvers to divert cool air through your existing duct system.
- Exclusive **EZReach Filter System** provides quick access to the washable air filter. Simply loosen the fastener and swing out the grille to remove the filter.
- Easy installation with fully illustrated instructions.
- Slender profile provides plenty of overhead clearance.

Choose the Chillgrille™ that's right for your RV!



Replace w/ 64955



Replace w/ 64955

64955 For 8000 Series Coleman Mach #8330A6331 1

*Coleman is a registered trademark of the Coleman Company, Inc. used under license. Mach is a registered trademark of RV Products, Inc.*

• **Model 8330-6331 (64955)** is for use with all 8000 Series Coleman®-Mach® air conditioners with lateral duct and straight through duct systems. To determine which model Chillgrille™ you need, simply remove the existing plastic ceiling assembly inside your RV.



**TUFF/MAXX**

**A/C Replacement Shroud**



**The LAST A/C Shroud You Will EVER Have To Buy**

- Limited LIFETIME WARRANTY to original owner (proof of purchase required)\*
- Replaces Coleman® 11,000, 13,500 and 15,000 BTU covers (Mach 1 and Mach 3 models)
- Features built-in rear fin guard and is made from extra thick, extra tough, UV protected plastic

\* Limited to replacement only by MaxxAir Vent Corp



64923 Tuff/Maxx Polar White #00-325001 ♦1



# AIR CONDITIONERS & ACCESSORIES

## MAJOR APPLIANCES **J**

In Section J:	Vacuum	Refrigerators & Acc.	Dishwasher	Ranges & Acc.	Washer/Dryer	Water Heaters	Furnace	Fans	Air Conditioners	Generators
---------------	--------	----------------------	------------	---------------	--------------	---------------	---------	------	------------------	------------



### RVP COLEMAN-MACH A/C THERMOSTAT INFORMATION

Wall thermostat reference guide. White.

- 64680** A-1, 24 VAC, Heat/Cool, no display #7330B3441 1
- 61962** A-1, 2-stage, Heat/Cool, with display #6636-3441 1
- 60277** A-1, Single Stage, Heat/Cool, no display, no plugs #7330G3351 1
- 64681** ICM, 24 VAC, Heat/Cool, with display #8330A3241 1
- 65659** ICM, Single Stage, for Heat Pump, with Display, no plugs #8530A3451 1
- 69845** **NEW!** ICM, Single Stage, Heat/Cool, with display, no plugs #8330-3362 1
- 66394** **NEW!** ICM, 2-Stage, Heat Pump #6536A3351 1



*Coleman-Mach*

### COLEMAN®-MACH® PARK PAC AIR CONDITIONER

**Cool down with the most powerful air conditioner for recreational park trailers**

You'll be amazed by the powerful cooling performance of the Park PAC, with the highest cooling capacity and airflow in the industry. The Park PAC utilizes oversized coils and dual fan motors for quiet and very efficient operation. Installation and service of the Park PAC are a breeze, also. The unit can be coupled directly to the floor ducts, or located on the ground anywhere under or around the trailer. There's even a built-in mounting pad for added convenience. Service panels are conveniently located, for easy access to all components. The Park PAC is designed to meet the needs of today's recreational park trailer industry with:

- Strong 535 CFM airflow, which will be more than adequate, even in demanding applications.
- 13,700 BTUH capacity (delivered).
- Oversized coils for higher efficiency and superior performance in high ambient temperatures.
- An energy Efficient Rating (EER) of 9+ ensures cost-efficient cooling.
- Dual fan motors for quiet, efficient operation.
- Flexible cold air discharge which can be directed in an upward or outward direction.
- Easy installation on built-in mounting pad.



- 115V AC, 60 Hz, 1 phase.
- Cooling full load amps at A.R.I. standard condition: 10.4 amps compressor; 1.9 amps outdoor fan motor, 1.8 amps indoor fan motor, 14.1 amps total.
- 1,540 running watts (standard), 2050 (max.).
- 67.0 compressor locked rotor amps.
- Easy access to internal components and electrical connections.
- 36" L x 21" W x 16-1/8" H; 116 lbs. unit weight.

- 64678** Park PAC #46413-812 ♦1
- Park PAC Air Conditioner Accessories:*
- 64679** Ducting Connector Kit #6633-6151 1
- 24 Volt Thermostat:*
- 64680** Standard #7330B3441 1
- 64681** Digital #8330A3241 1



### MAC HEAVY DUTY HOURMETERS

Features white on black graphics. Records to 999.9 hours.

#### ROUND HOURMETER

Mechanical. 10/130V. U bracket mounting.

- 17466** MAC Heavy-Duty Hourmeter, Round #105859 876-12/24V 1

#### MINI-HOURMETER

Mechanical. 10/80VDC. 2 hole mounting.

- 17467** MAC Heavy-Duty Mini-Hourmeter, Rectangular #105861 12/24V 1

*Coleman-Mach*

### COLEMAN®-MACH® Two Tons PLUS

**NEW!**

#### Central Air Conditioner

*This powerful air conditioner is out of sight.*

The Two Ton PLUS™ Central Air Conditioner. You won't see it on your RV, because this alternative to rooftop air conditioners installs completely out of sight on or underneath the floor of your RV.

You can customize the installation to locate the unit where it works best in your particular RV application, and can also tailor the air distribution system to fit your design requirements. It also contributes to a lower center of gravity, enhancing the overall stability of the vehicle.

The Two Ton PLUS. is unique because it utilizes two compressors in a single, self-contained package. When cooling requirements are moderate, it uses only one compressor. When additional cooling is needed, you get the additional benefit of a second compressor.



#### Central Heat Pump

*Flexible installation lets you put your unit where you want it!*

The Two Ton PLUS™ is unique because it features two 13,500-BTU compressors in a single packaged unit. It automatically cycles on one or both compressors, as required, to meet your air conditioning or heating needs. In the heating mode, the Two Ton PLUS™ uses electricity to provide heat when temperatures are moderate.

- 69859** Two Tons PLUS, Central Air Conditioner, With Heat Pump #46515-811 ♦1
- 69861** Lifeline Wiring Harness #6795C4351 1

Change Your Generator's Oil The Easy Way!

**SHURflo**  
SHURFLO OIL  
CHANGE SYSTEM



- Complete with necessary hoses and oil storage container.
- Thermal overload protection.
- Built in reversible switch and eight foot cable with battery clips.
- BUNA-N impeller.


Simple, safe and sanitary. SHURflo's oil change system makes a messy job clean and easy. Simply install the oil probe in the engine oil dipstick tube, attach the battery clips, and flip a switch. Oil is safely removed and stored in the easy to carry container. The flexible impeller pump incorporates a Buna impeller that allows use for a variety of applications, from bait tanks to wash down and fresh water. It can also be used as an emergency bilge pump, or for cleaning work oil spills.

3.75 GPM. 4.27 Amps, 20 PSI, 12VDC

**25950** Shurflo Oil Change System  
#8050-305-426 <sub>1</sub>

S/O Replacement Impeller #94-391-12

**Dinosaur Electronics**



**DINOSAUR ELECTRONICS  
REPLACEMENT CONTROL BOARD  
FOR ONAN GENERATORS**

Features fuses on board to provide protection from short circuit damage. Plated and soldered through connections to virtually eliminate intermittent connections. 3 year warranty. #64853 comes complete with a new bridge rectifier.

**64853** Board #300-2784/2943 <sub>1</sub>

For Built-in Generators



Patented

**GEN-TURI™  
AIR COOLED  
VENTURI GENERATOR  
EXHAUST SYSTEM**



Close quarters at rallies and tailgate parties create a need for noise and exhaust fume reduction. Gen-turi diverts nasty fumes away from the ground, where they can be inhaled by neighboring RVers. Be a good neighbor. Vent generator exhaust above the roof line while reducing noise. Weighing only nine pounds, Gen-turi installs easily and disconnects quickly.

**65438** Exhaust System #44461 <sub>4</sub>



**ARCON  
GENERATOR  
ADAPTERS**



**Adapter L5-30 to 5-20R—**  
30A Twist Lock Male to 20A Female. Bulk.

**11827** 30A Twist Lock Male to 20A Female,  
(Not available in Canada) #AD-012 <sub>100</sub>

**Adapter L5-30 to 2 x 5-20R—**  
30A Twist Lock Male to two 20A Female. Bulk.

**11828** 30A Twist-Lock Male to Two 20A Female  
(Not available in Canada) #AD-212 <sub>30</sub>



**PARK POWER by MARINCO  
4-PRONG GENERATOR ADAPTER**


- For use when running power from a generator through the detachable power connection.
- Male end plugs into generator's 30A 4-prong connection.
- 30A detachable 4-prong male plug with 30A RV female connector.
- 5-yr warranty.

**15329** 30A 4-prong generator adapter  
(Not available in Canada) #172ARV <sub>1</sub>

**PARKPOWER by MARINCO  
RV 50 AMP LOCKING GENERATOR  
ADAPTER (4-PRONG)**

- Use to connect standard 50A straight blade RV cordset to generator equipped with 30A, 4-prong locking receptacle (L14-30R).
- Molded ends with 12" of flexible cable for maximum weatherproofing.

**16839** 50A 4-prong generator adapter  
(Not available in Canada) #174ARV <sub>6</sub>

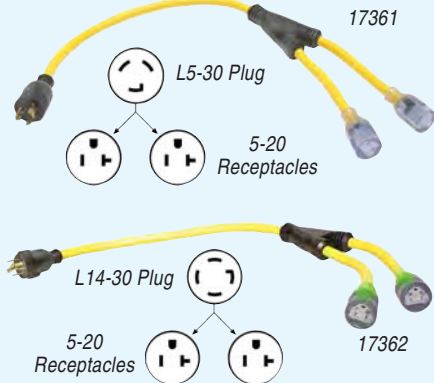


**ARCON GENERATOR ADAPTERS  
GENERATOR Y-ADAPTERS**

Adapter L5-30P/5-20R adapts one locking 5-15 plug to two lighted 5-20 receptacles.

**17361** Generator Adapter L5-30P/2 x 5-20R  
(Not available in Canada)  
#L530520TSTOW <sub>5</sub>

Adapter L14-30P/5-20R adapts one locking L14-30 plug to two lighted 5-20 receptacles.


**17362** Generator Adapter L14-30P/2 x 5-20R  
(Not available in Canada)  
#L430520TSTOW <sub>5</sub>

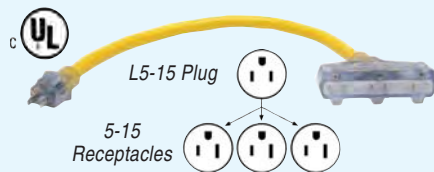

**GENERATOR POWER BLOCK**

Arcon Generator Power Block adapts one 5-15 plug to three lighted 5-15 receptacles. Lighted ends confirm power.

**17360** Generator Cord Tri-Source Adapter  
#515004STOW <sub>5</sub>

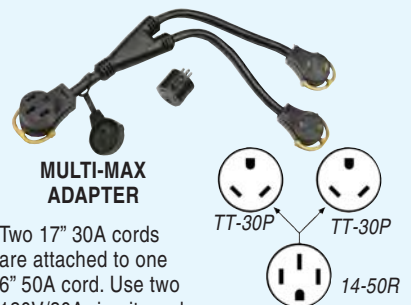

**MULTI-MAX  
ADAPTER**

Two 17" 30A cords are attached to one 6" 50A cord. Use two 120V/30A circuits and one 30A-20A adapter to provide 240V/50 amps of service. Use a 15A-30A adapter and one 30A cord of the Multi-Max to hook a 50A RV service cord to a 120V outlet at home.

**17341** Multi-Max Adapter  
(Not available in Canada) #272005 <sub>10</sub>