

FRESH WATER LINE & ACCESSORIES

PLUMBING

L

In Section L: Fresh Water Line Filters Winterizing Pumps Faucet & Shower Sink & Drain Holding Tanks Drain Valves & Fittings Drain Hose Chemicals & Toilets



Guaranteed not to kink or tangle

TEKNOR APEX HOSES

- Lead-free™ construction compliant with RoHS standards restricting lead content to less than one-tenth of 1% lead by weight in homogeneous material.
- Manufactured with F.D.A. sanctioned materials. Drinking Water Safe.

AQUA-FLEX HOSE

- ThumThing® coupling for easier attachment to the faucet.

Aqua-Flex Water Line:

20125 1/2" x 25' #7503-25 10

20126 1/2" x 50' #7503-50 10

NEVERKINK SELF-STRAIGHTENING HOSE

- Constructed with NTS Reflex Mesh® patented technology eliminates kinks, twists & tangles.
- Grip-Tite® coupling for easy, leak free attachment at the faucet.

NeverKink RV/Marine Hoses:

28043 1/2" x 25' #7602-25 10

28044 5/8" x 25' #8602-25 10

28045 5/8" x 50' #8602-50 5

AMERICAN SPECIALTY UTILITY WATER HOSE

Don't drag out that long tangled hose for a small job! FDA approved hose is drinking water safe and lightweight.



25771 Utility Hose, 4' L #UT-4 12



APEX STOW-A-WAY HOSE CARRY STRAP

- Convenient one-piece sturdy construction.
- Has a hang-up hold. Great for storage.
- Adjustable strap holds a variety of hose lengths.

26023 Stow-A-Way Strap #HH-102 1

5/8" size has hose-end protector



Easy-to-thread ends

Lead-free™ construction compliant with RoHS standards restricting lead content to less than one-tenth of 1% lead by weight in homogeneous material. High-pressure RV white water lines. Drinking water quality: tasteless, odorless and safe. Easy to coil. Non-toxic.

Aqua Pro Water Line:

20150 1/2" x 25' #20150-AP 10

20151 1/2" x 50' #20151-AP 10

21317 5/8" x 25' #21317-AP 10

21318 5/8" x 50' #21318-AP 5

AQUA PRO DRINKING WATER HOSES



28013

AQUA-FRESH HIGH-PRESSURE DRINKING WATER HOSE

High-pressure, fresh water drinking hose. Easy-to-use Hose Gripper included. 1/2" hoses 160 psi working pressure. Non-toxic. 10-yr. mfr. warranty. White.

Drinking Water Hose:

28012 4' #W01-5048 10

28013 10' #W01-5120 10



AMERICAN SPECIALTY MFG. HANDI-HOSE AND REEL

Handi-Hose is a compact, lightweight, extremely durable water hose with standard garden hose couplings. Remains pliable in all weather. Built-in self-squeegee system. Safe for drinking water; rated by FDA as non-toxic. White. Replacement hose also available.

21721 25' Hose w/Reel #MRT-25 6

20021 50' Hose w/Reel #MRT-50 6

24422 25' Hose Only #MHT-25 1

VALTERRA HIGH PRESSURE FRESH WATER LINES

For underground application, for permanent or long water line hookups. May be buried below frost line to help prevent freezing. Will not corrode or rot. Tasteless, odorless, non-toxic. Safe for drinking water. Safe for permanent and semi-permanent cold water application. Bursting pressure 720 psi; working pressure 180 psi.

Ebonyline High Pressure Water Line:

20142 1/2" x 10' #W01-0010 10

20157 1/2" x 15' #W01-0011 6

20158 1/2" x 25' #W01-0012 5



**AQUA PRO
COILED WASHDOWN HOSES
WITH NOZZLE**

- 1/2" Inner Diameter
- UV Resistant
- 3/4" Solid Brass Fittings
- Self-Coiling, No Kink, Space Saving Design
- Non-Drinkable Hose
- 6 Position Adjustable ABS Plastic Nozzle.

Washdown hoses with nozzle:

20092 25' Coiled Washdown Hose with nozzle, 25' Polyurethane Hose #P-0441BA 5

20098 50' Coiled Washdown Hose with nozzle, 50' Polyurethane Hose #P-0442BA 6



**AQUA PRO
PLASTIC HOSE ELBOWS**

- For RV, Home Faucet or Behind Washer
- Features Quick Grip For Easy On & Off

45° and 90° hose elbows allow the water to flow freely by helping to eliminate kinks in the hose. Plastic elbow is made of food-grade, non-toxic ABS plastic with UV stabilizer for long-lasting, trouble-free use. Carded.

Plastic Hose Elbow:

24988 Hose Elbow, 90° #24988 20

27987 Hose Elbow, 45° #27987 24

**HANDI-HOSE
SUPER FLEX**

Adds years of life to hose by eliminating kinking at the faucet. Maintains full flow even at a 90° angle. Solid brass couplings, heavy duty braided hose. A full 5/8" flow of water, 600 psi burst.



24541 Super Flex, CD/1 #HSP 12



AQUA PRO CAP & PLUG

Keep dirt & debris out of fresh water hoses or regulators. Male threaded replacement plugs for most water fills with brass garden hose connections. Female threaded cap for use on any male threaded garden hose end or water regulator. Will fit any 3/4" male garden hose thread. Includes strap. White.

27838 Plug & Strap, Bulk #27838 1

27839 Plug & Strap, CD/1 #27839 1

27917 Cap & Strap, CD/1 #27917 1



Hook this 3-1/4" connector to any standard-size unthreaded faucet or those with stripped threads and attach your garden hose. Stop wasting water due to poor connections.

28383 Water Bandit #22484 6

**VALTERRA
HOSE
SAVER
WITH SPRING**



You know those times you really wish you could bend that hose connection "just so"? Here's the solution. Valterra Hose Saver with Spring prevents hose kinking at the faucet or RV connection. Medical grade plastic; drinking water safe.

28348 Hose Saver with Spring #A01-0040VP 5

**VALTERRA
90 DEGREE HOSE SAVER
LEAD-FREE BRASS**

90 degree hose saver prevents hose from crimping or pinching. Lead-free brass meets CA & VT laws on lead content for drinking water fixtures. Includes EZ hose gripper. Works on RV 's or homes.



20054 90° Hose Saver, Lead-free, Carded #A01-0020VP 50



VALTERRA HOSE SAVERS

Prevents hose from crimping or pinching. EZ Hose gripper pre-assembled for ease of use. Works for RV's or homes. Brass. Carded.

Hose Saver

(Not approved for sale in CA and VT):

27922 45° #A01-0118VP 1

27923 90° #A01-0119VP 1

In Section L:	Fresh Water Line	Filters	Winterizing	Pumps	Faucet & Shower	Sink & Drain	Holding Tanks	Drain Valves & Fittings	Drain Hose	Chemicals & Toilets
---------------	------------------	---------	-------------	-------	-----------------	--------------	---------------	-------------------------	------------	---------------------

VALTERRA FRESH WATER HOSE ACCESSORIES



“HOSE FIXER” WATER HOSE REPAIR FITTINGS

Save that water hose. In-line mender, fixes 1/2" or 5/8" hose. Simply cut hose evenly at break or damage, insert connector, fasten the 2 clamps. Great for making extended length hoses too. Also available: female and male repair ends.

Hose Fixer, Carded:

- 25523** Hose x Male Hose Thread #A01-0050VP 1
- 25524** Hose x Female Hose Thread #A01-0055VP 1
- 25525** Hose x Hose #A01-0060VP 1



PISTOL NOZZLE

Pistol-grip nozzle for your water hose has a fully adjustable spray—easier to control water while cleaning your RV or boat or watering the roses.

Pistol Nozzle, Carded:

- 25531** Plastic #A01-0136VP 36
- 25532** Metal #A01-0134VP 30




3/4" HOSE CAP, HOSE PLUG

Male Threaded Hose Plug w/Strap, Off-White:

- 28104** 3/4", Carded #T1020-1EVP 5
- 20086** 3/4", Bulk #T1020-1E 1

Hose Cap with Strap, Carded:

- 28014** 3/4", Black #T1020-1DVP 1
- 28010** 3/4", White #T1020-1DWVP 1

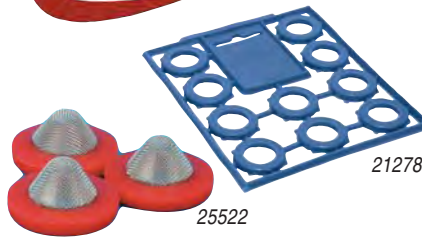

HOSE WASHERS

GARDEN HOSE WASHERS

Garden hose washers with hanger.

- 21278** Washers, CD/10 #W1516VP 1

GARDEN HOSE WASHERS WITH SCREEN

- 25522** Screen Washers, CD/3 #W1526VP 1



QUICK CONNECT WITH 90° HOSE SAVER ADAPTER

90° hose saver adapter makes RV water hookup quick and easy. Includes spare straight adapter. Plastic. Carded.

- 25527** Quick Connect/Adapter #A01-0137VP 1



24632



24633



25780



25942



24631

HOSE SHUT-OFFS

PLASTIC HOSE SHUT-OFF

- 24631** Hose Shut-Off, CD/1 #A01-0125VP 1

SIAMESE HOSE SHUT-OFF

- 24632** Plastic Siamese Hose Shut-Off, CD/1 #A01-0130VP 24
- 24633** Zinc Siamese Hose Shut-Off, CD/1 #A01-0131VP 24

Fresh Water Valve! EZ DIAL 2 WAY HOSE SHUT OFF

Easy to grip, easy to turn dial. Control water direction with a trouble-free turn of the dial.

- 25780** EZ Dial 2 way hose shut off #A01-0132VP 1

HI FLOW SHUT-OFF VALVE— GREAT FOR USE WITH TANK RINSERS!

Hi Flow Shut-Off Valve has a unique 3/8" larger internal opening for maximum water flow vs. the 5/16" opening common on most import shut-off valves. It is an ideal shut-off valve for use with any tank flushing product.

- 25942** Hi Flow Shut-Off Valve, Carded #A01-0144VP 30



21277

20075

VALTERRA QUICK FILL PIGTAILS

Quick Fill Pigtail with shut-off includes a large 3/8" opening valve and 5/8" tubing for the maximum fill rate. Quick Fill Pigtail reduces back flow pressure, cutting fill time in half. Easily slips into all water tank fill fittings.

Quick Fill Pigtail Water Tank Filler:

- 20075** Without Shut-Off Valve #A01-0030VP 1
- 21277** With Shut-Off Valve #A01-0031VP 1

Aqua Pro™



Deluxe Regulator



Standard Regulator

AQUA PRO PRODUCTS

RV WATER REGULATOR

Protect your RV plumbing system from damage due to high pressure. Outlet pressure is preset to 45 psi. Fits all standard garden hose and hose bib type connections. The "Easy Gripper" makes installation easy, and eliminates the need for tools. Made of high quality, food grade, non toxic materials that meet IAPMO and NSF requirements. Standard models include an "Easy-Gripper" and a washer w/strainer, are rated for 150 psi, max, and have a 1-yr warranty. Deluxe models include an "Easy-Gripper" and a washer w/strainer, male and female protective covers with "Keeper" straps to keep dirt and debris out during storage, are rated for 300 psi, max, and have a 2 yr warranty.

Water Regulator:

- 27549** Standard, CD/1 #27549 48
- 27550** Standard, Box/1 #27550 50
- 27866** Deluxe, CD/1 #27866 96
- 27867** ^{LS} Deluxe, Box/1 #27867 10



27784

27866

UNIVERSAL GAUGE ADAPTER

Monitor water supply pressure to your RV plumbing system to help prevent damage due to high pressure. Can be used inline with any hose bib type water regulator or any water line with a garden hose type connection. Rated for 300 psi. Made of food grade, non-toxic materials. 1-year warranty.


- 27784** Universal, CD/1 #27784 6



VALTERRA PRESSURE GAUGE

Pressure gauge adapts for use with standard water regulators. Allows you to know the hook up water pressure, since high water pressure can damage your RV plumbing system.

- 27658** Water Pressure Gauge, Carded (Not approved for sale in CA and VT) #A01-0112VP 1

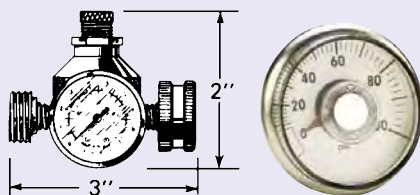

WATER PRESSURE REGULATOR

Takes the worry out of replenishing your water tank by automatically turning the water off when pressure reaches 40 lbs. 3/4" NH hose connection. Gauged version adjusts from 0 to 60 lbs. These valves are especially designed for units with self-contained water supply tanks. The valve will also supply water automatically as needed to the tank for overnight or semi-permanent stays, saving wear and tear on the pump or compressor. Adjustable pressure; and can be easily disassembled for cleaning.

Water Pressure Regulator:

- 20152** Without Gauge #0355010 1
- 20153** With Gauge #0355020 1



VALTERRA WATER REGULATORS

WATER REGULATOR

Protects your RV's or boat's plumbing system against extreme high pressures. Outlet pressure factory set at 45 psi. Fits all standard water hose and campground water risers. Includes easy to use hose gripper.

Water Regulator (Not approved for sale in CA and VT):

- 27374** Bulk #A01-1115 1
- 27375** Carded #A01-1115VP 30

HI FLOW WATER REGULATOR

All brass interior and increased water flow make this the top of the line water regulator a real winner! Factory set to keep pressure between 50 and 55psi.

- 28015** Hi Flow Water Regulator w/gripper, Carded (Not approved for sale in CA and VT) #A01-1113VP 12

WATER REGULATOR & GAUGE COMBO

High water pressure can damage RV water systems. Check it and regulate it with this Valterra Combo Kit. Carded.

- 28016** Water Regulator & Gauge Combo (Not approved for sale in CA and VT) #A01-1118VP 6

Protects RV's plumbing system against high pressure

HIGH FLOW STAINLESS STEEL WATER REGULATOR



- Lead free. • 15 to 20% greater flow.
- Preset at 50 psi. • Carded.

- 28729** High Flow Stainless Steel Water Regulator #A01-1114VP 12



LEISURE TIME CITY WATER ENTRY CAP

Attaches to your city water entry. Built in ventilation holes stop bacterial development and allow only air to enter city water hook up. White.

- 27611** Water Entry Cap #15009 5

In Section L: Fresh Water Line Filters Winterizing Pumps Faucet & Shower Sink & Drain Holding Tanks Drain Valves & Fittings Drain Hose Chemicals & Toilets



VALTERRA WATER REGULATORS LEAD-FREE

Protects your RV plumbing against high pressure. 15 to 20% more flow than standard regulators. Regulates incoming water pressure to 50-55 psi. This lead-free brass conforms to CA & VT lead laws for drinking water fixtures.

20057 Water regulator, Lead-free, Brass, Bulk #A01-1120VP 12


20077 Water regulator, Lead-free high flow, Carded #A01-1122VP 12

WATER REGULATOR & GAUGE COMBO LEAD-FREE

Water regulator protects your RV plumbing system against high pressure. Gauge allows you to know the hook-up water pressure. Lead-free brass meets CA & VT laws on lead content for drinking water fixtures.



20056 Water Regulator & Gauge Combo Lead-free, Carded #A01-1124VP 6

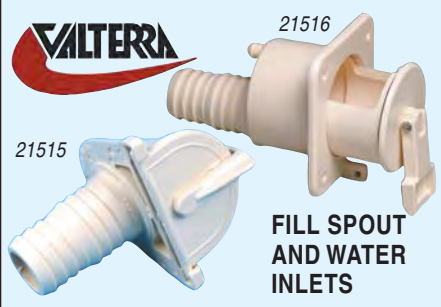

FILL SPOUT AND WATER INLETS

Rigid, telescoping, heavy duty ABS construction for long lasting durability. O-ring seal for leakproof closure. 1 3/8" or 1 1/4" barb inlet.

Flush Mount Telescoping Water Fill:

21516 Ivory, Bulk #R920 1

27302 White, Bulk #R920TW 1

Top opening surface-mount fill spout with barbed connection. 1 3/8" x 1 1/4" Barb Inlet.

Water Fill:

21515 Ivory, Bulk #RF911 1

28075 Ivory, Carded #RF911VP 6



SHURflo PRESSURE REGULATED CITY WATER ENTRY

WALL MOUNT PRESSURE REGULATOR

- Quick, permanent wall mount.
- Continuous protection from high pressure surges.
- Fits standard hose fittings.
- Built in check valve.

This combination water regulator and check valve with exclusive Shurflo diaphragm design provides continuous protection from high pressure surges in the city water system. Pressure limited to 65 PSI. Leak tight construction. Quick, permanent wall mount installation on walls of any thickness.

20121 City Water Entry, White, with 65 PSI #183-029-18 1



SHURflo PRESSURE REGULATED CITY WATER ENTRIES

WALL MOUNT PRESSURE REGULATOR

This combination water regulator and check valve with exclusive SHURflo diaphragm design provides continuous protection from high pressure surges in the city water system. Pressure limited to 65 psi. Leak tight construction. Quick, permanent wall mount installation on walls of any thickness.

- Quick, permanent wall mount.
- Continuous protection from high pressure surges.
- Fits standard hose fittings.
- Built-in check valve.

Filler/Regulator, Wall Mount:

28437 Chrome #183-029-14 24


28474 Cream #183-029-11 24



ZEBRA RV ACCESSORIES CITY WATER ENTRY 1/2" F.P.T.

- City water connection port with locking hinged lid cover that protects and keeps the fill clean.
- Built-in check valve.
- Female garden hose connection.
- Durable ABS plastic.
- 3-1/2" x 3-1/2" O.D. • Packaged.

20161 Polar White #RC146P 12

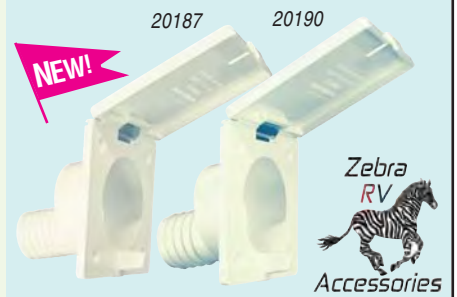

20187, Packaged



ZEBRA RV ACCESSORIES FLUSH MOUNT GRAVITY FILLER SPOUT

- Durable ABS plastic water fill spout includes locking snap-lid cover which protects and keeps fill clean.
- Flush mount tank water gravity feed has a built-in vent port.
- For either 1-1/4" or 1-3/8" tubing.
- Packaged.

3-1/2" x 3-1/2" O.D. Polar White:

20187 1-1/4" #RT144P 12

20190 1-3/8" #RT145P 12



JR PRODUCTS RUBBER DUST PLUG

Original replacement city water fill dust cover. Made of flexible 100% rubber for long lasting use. Non-threaded for easier use; installs quickly to any city water fill.


78838 Dust Plug #422-PW-A 1

LASALLE BRISTOL GRAVITY FILLER

Recessed gravity water inlet with 1 3/8" O.D. and 3/8" I.D. barb connection and 3/8" barb vent connection. White.



21044 Gravity Fill #74BPC73C 1



AQUA PRO CITY WATER FILLS

Recessed and surface mount models to fit all applications. Direct replacement for Marshall Brass and JR Products models. All Aqua Pro models are made of non-toxic materials, have "poppet" style check valves, 1/2" pipe thread and are certified to IAPMO and NSF standards.



AQUA PRO WATER FILLS & CHECK VALVES



RECESSED MODELS

Recessed models are 4.5" outside dia. and require a 3.5" dia. cutout. Available in metal or plastic. Metal is powder coated for a long lasting finish. Plastic is UV stabilized for durability.

Metal Recessed Mounting Flange w/1/2" FPT:

- 27870** ^{LS} Col. White, Bulk #27870 1
- 27882** Colonial White, CD/1 #27882 1
- 27885** ^{LS} Polar White, Bulk #27885 1
- 27886** Polar White, CD/1 #27886 1

Plastic Recessed Mounting Flange w/1/2" MPT:

- 27889** ^{LS} Col. White, Bulk #27889 1
- 27890** Colonial White, CD/1 #27890 1
- 27887** ^{LS} Polar White, Bulk #27887 1
- 27888** Polar White, CD/1 #27888 1

MODELS WITH NO MOUNTING FLANGE

No Mounting Flange w/1/2" FPT:

- 27868** ^{LS} Bulk #27868 1
- 27880** CD/1 #27880 1



SURFACE MOUNT MODELS

Surface mount models are available in metal, plastic and aluminum. Metal is powder coated for a long lasting finish. Plastic is UV stabilized for durability. Aluminum has a "brushed" finish. Surface mount models are 3" outside dia., and require a 1-1/4" dia. cutout.

Aluminum Surface Mounting Flange w/1/2" FPT:

- 27869** Bulk #27869 1
- 27884** CD/1 #27884 1

Metal Surface Mounting Flange w/1/2" FPT:

- 27883** Polar White, Bulk #27883 1
- 27881** Polar White, CD/1 #27881 1

Plastic Surface Mounting Flange w/1/2" MPT:

- 27892** Colonial White, CD/1 #27892 1
- 27895** Polar White, Bulk #27895 1
- 27893** Polar White, CD/1 #27893 1

AQUA PRO CHECK VALVES

Direct replacement for Marshall Brass and for Hydronamic Products. Aqua Pro models are made of non-toxic, food-grade materials, have 1/2" pipe thread, and are certified to IAPMO and NSF standards.

Aqua Pro Check Valve:

- 27915** 1/2" MPT x 1/2" MPT, Bulk #27915 1
- 27916** 1/2" MPT x 1/2" MPT, CD/1 #27916 1
- 27871** 1/2" MPT x 1/2" FPT, Bulk #27871 1
- 27879** 1/2" MPT x 1/2" FPT, CD/1 #27879 1



JR PRODUCTS CITY WATER FLANGE

Low profile design, U.V. stabilized, fade resistant, and impact resistant. Equipped with 1 piece check valve with 1/2" M.P.T. Resistant to road salts, road acids and gasoline. 3" outside dia., 1.5" dia. cut-out.

- 41285** Colonial Whitez #160-85-A-16-A 12



JR PRODUCTS LOCKABLE GRAVITY WATER HATCH

1/2" O.D. air vent. Will accept small padlock; has a snap lock. Low profile design is U.V. stabilized, fade resistant and impact resistant. Easy installation. Dimensions: cutout 3 1/2" dia., outside 4 1/2" dia.

Lockable Gravity Water Hatch:

- 25420** Colonial White #370-A-1-A 1
- 25421** Polar White #370-A-2-A 12



Zebra RV Accessories

NEW!



ZEBRA RV ACCESSORIES 1 3/8" GRAVITY FILL SPOUT WITH FLANGE

- 4-1/4" x 4-1/4" Remodel plate covers old water fill cavity. • Fits 1-3/8" tubing.
- Built-in vent port. • Locking hinged cover protects and keeps fill clean. • Packaged.

- 20179** Gravity Fill Spout, Polar White #RM433P 12



In Section L: Fresh Water Line Filters Winterizing Pumps Faucet & Shower Sink & Drain Holding Tanks Drain Valves & Fittings Drain Hose Chemicals & Toilets

JR PRODUCTS CITY WATER FLANGE

WITH PLASTIC CHECK VALVE & STEEL FLANGE

Comes with a die cast steel flange for secure mounting. Combined with a chrome plated finish and stainless steel mounting screws for a great look and durability. Replaces most steel flanged units. The 1/2" male pipe thread is a standard in the RV industry.



27822 City Water Flange w/ Check Valve, Packaged #9690-200-023 18



WITHOUT PLASTIC CHECK VALVE

Water flange assembly. RV end is a 1/2" - NPT tapered male thread. The water input is a standard 3/4" - 11-1/2 NH garden hose thread. The body is ABS plastic with a zinc flange and rubber washer. With attached plastic dust cover.

22222 City Water Flange w/o Check Valve #9691-300-023 18



JR PRODUCTS CITY WATER DISH

With plastic check valve. 4.5" outside dia., 3.5" cut-out dia.

27472 City Water Dish #321-B-2P-A 12

With 1/2" O.D. air vent. 4.5" outside dia., 3.5" dia. cut-out.

Gravity Water Dish:

41283 Colonial White #321-A-13-A 12

78833 Polar White #321-A-23-A 2

Low profile design, U.V. stabilized, fade resistant, and impact resistant. Equipped with 1 piece check valve with 1/2" M.P.T. Resistant to road salts, road acids and gasoline. 4.5" outside dia., 3.5" dia. cut-out.

78832 Colonial White #321-B-16-A 2



JR PRODUCTS LOCKING CITY WATER HATCH W/KEY LOCK

Features a plastic check valve and key lock. Outside dimensions: 6" W x 6.5" H; cut-out: 4-1/4" W x 4-3/4" H.

27473 City Water Hatch with Key Lock, Polar White #BGE12-P-A 12

CITY/GRAVITY WATER DISH WITHOUT DOOR

Features replaceable plastic check valve. Easy installation. 1/2" O.D. air vent. Outside dimen.: 7-9/16" W x 5-5/16" H; cut-out 6" W x 3-3/4" H.

27469 Water Dish #497-AB-2P-A 12

JR PRODUCTS UNIV. ONE-PIECE GRAVITY WATER FILL CAP

One-piece universal cap and strap is designed to fit most gravity water fills, threaded or bayonet style with an inside diameter of 1-1/4". Polar white flexible rubber strap resists fading and breakage. Easy to install: slips over the neck of your water fill. No more hard brittle plastic straps or caps to lose or crack.

28305 Gravity Fill Cap #615-PW-A 1



REPLACEMENT KEYS FOR B&B OR JR PRODUCTS LOCKING HATCH

Replacement Keys, Pk/2:

44846 Square Head #DECO-A 12

49399 Round Head #751-A 12

JR PRODUCTS GRAVITY WATER HATCH

Protects water system against vandalism, dust and grime. Key-locking door with RVIA-approved warning tag. IAPMO and CSA approved. Fits 1 1/4" and 1 3/8" hose. Hatch dimensions: 5" W x 6 1/4" H. Cut-out dimensions: 3 1/8" W x 4 3/8" H. Packaged.

27810

Gravity Water Hatch:

27305 Polar White #A6112-A 1

Replacement Cap & Fill Spout:

21678 Colonial White #222/224CW-A 1

25674 Polar White #222/224PW-A 1

Replacement Cap & Strap only:

27788 Colonial White #222CW-A 1

27789 Polar White #222PW-A 1

Replacement Strap only:

27810 For 222/224PW #STRAP 1



21678, 25674

JR PRODUCTS LOCKING WATER CENTER

Will accommodate gravity or city water hookups. City fill has a 1-piece check valve 1/2" MPT. Easy installation, low profile and will fit in any wall. 6.5" x 7-5/8" outside dimensions; 4 3/4" H x 5 7/8" W cut-out dimensions.

Locking Water Center w/ Plastic Check Valve:

27470 Polar White #K7112-P-A 1

Replacement Cap & Fill Spout:

21678 Colonial White #222/224CW-A 1

25674 Polar White #222/224PW-A 1

Replacement Cap & Strap only:

27788 Colonial White #222CW-A 1

27789 Polar White #222PW-A 1



GRAVITY WATER HATCH

Low profile. UV stabilized; fade and impact resistant. Paintable. Dimensional stability. Key lock. Easy installation. 1/2" O.D. air vent. Resistant to road salts and acids. Outside dimensions 6" W x 6.5" H, with a 4.25" W x 4.75" H cut-out size.

Gravity Water Hatch:

- 27359** Polar White #JFE12-A 12
Replacement Cap & Fill Spout:
- 21678** Colonial White #222/224CW-A 1
- 25674** Polar White #222/224PW-A 1
Replacement Cap & Strap only:
- 27788** Colonial White #222CW-A 1
- 27789** Polar White #222PW-A 1



**JR PRODUCTS
CITY
WATER FLANGE**

With plastic check valve. 3" outside dia.; 1.5" cut-out dia.

- 27471** City Water Flange, Polar White #160-85-A-2P-A 12


PLASTIC CHECK VALVE

Replacement check valve for all new hatches. This check valve is easily replaced by removing a clip located on the back of the hatch or dish. Superior design with a spring and ball system for longer life and is complete with a new hose connector with four raised thumb grips for easier connections. Fitting is 1/2" MPT.

- 28545** Plastic Check Valve, Polar White #2P-A 1

FLEX-LINE

IAPMO approved. Easy to bend and cut.

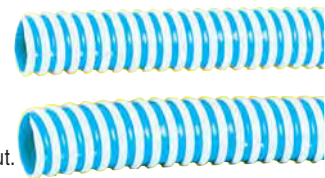

- 25 ft. L Flex-Line:
- 27608** 1 1/4" I.D. #F-1125 4
- 27607** 1 3/8" I.D. #F-1135 4

**POLYETHYLENE
SPIN-WELD
FITTINGS**

Water tank fitting, female pipe thread.



- 24743** 1/2" Fitting #OS-03 1
- 24744** 1-1/4" Fitting #OS-19 1
- 24745** 1-1/2" Fitting #S-4-B 1
- 24747** 3" Fitting #S-6AB 1

**LASALLE BRISTOL
WATER TANK FITTING**

1-1/4" barb x 1-1/4" MPT.


- 24760** Elbow Adapter #74BPC80 1



**JR PRODUCTS
KEY LOCKS**

Cam lock for replacement in B&B Molder hatches as well as any other place a barrel lock is needed. Comes keyed for a 751 style key to match other compartments and hatches.

- 751 Key Code Lock Cam w/Key:
- 43018** Long, 1-1/8" Blade #00100 1
- 43026** Short, 5/8" Blade #00E00 1

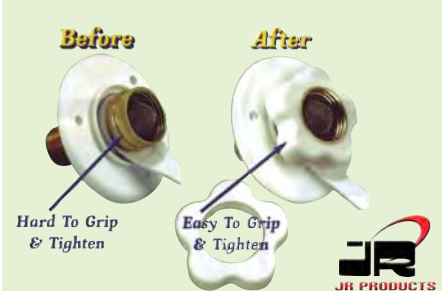

JR PRODUCTS CONNECT-IT-TIGHT

The Connect-It-Tight makes tightening your city water line quick and easy. Finally an end to leaking water connections. With its large grip points and a hardened rubber compound, Connect-It-Tight will help you get a tight connection to your water hose. You can also use it on any standard female collar water hose connection.

- 28458** Polar White, Pk/1 #616-05-E-PW-A 1



**RV DESIGNER
HATCH LOCK WITH 1 1/8" CAM**

Used on water, electric, gas hatches etc.

- Clamshell packaging: 3" W x 5" H x 1" D:
- 44842** Hatch Lock with 1-1/8" cam #L100 1
- 44843** Hatch Lock with 5/8" cam #L110 1
- 44844** Replacement Key, Code 751, Pk/2 #L200 1

**CP PRODUCTS
TANK PROBE**

Use this sensor with your tank monitor panel. The probe works with fresh or waste water tanks, and is easy to install—just drill a hole in the tank, insert the probe and screw closed for a water tight seal.

- 21886** Tank Probe Well Nut #MP5 1



**POLYETHYLENE
FLEX TANK FITTINGS**

To connect fittings, just drill a hole in the tank, insert the fitting (compression end, while loosely threaded) into the hole. Twist the outside end. The compression piece inside the outside fitting, sealing the fitting tight.

- 21033** 1/2" FPT Flex Fitting (Drill 1-1/8" Hole) #PS2 1
- 21034** 1-1/4" Barb Fitting (Drill 2" Hole) #PS10 1



VALTERRA BARB FITTINGS

These fittings can be used with the 21033 fitting.


- 21070** Barb Fitting, 1/2" MPT x 1/2" Barb Elbow #RF846 25
- 21078** Union Fitting, 1/2" MPT x 1/2" Barb Straig #RF841 25

FRESH WATER TANKS & ACC. • DRAIN COCKS

PLUMBING


L

In Section L: Fresh Water Line Filters Winterizing Pumps Faucet & Shower Sink & Drain Holding Tanks Drain Valves & Fittings Drain Hose Chemicals & Toilets

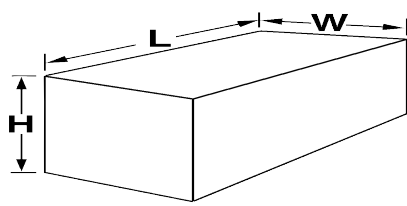

POLYETHYLENE WATER TANKS WITHOUT FITTINGS (Regular Shape)


Use polyethylene flex tank fittings (not included)

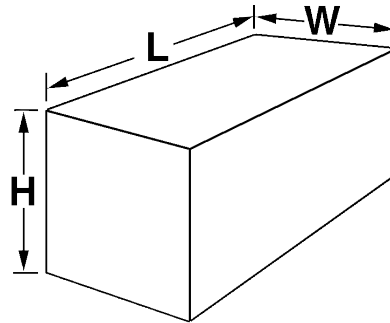



IRREGULAR SHAPE POLYETHYLENE WATER TANKS (Fittings Not Included)

Use polyethylene flex tank fittings (not included).



Order #	Mfr. #	U.S. Gallons	L (inches)	W (inches)	H (inches)	Price
21965	W0524-605	11	17	16	10	
22457	46	14.5	22	13	12.75	
22460	24	18.5	32.5	12	12	
23247	8	20	33.25	17.25	8.75	
22465	1029	20.5	24	18	11.75	
22481	84/622	26	31	21	10	
22454	64-607	28.5	34	17.25	12	
22485	587	28.5	51.5	18	7.75	
22476	1085	37.5	58	16	10	
22462	199	39	54	20.5	9	
22459	193	41.5	70.75	14.5	10	
22469	W1177	50	38	22.25	14.25	
22471	533	54	51	20	13	
22472	116	63	46.5	16	20.75	

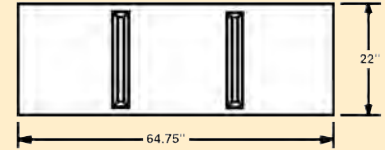


51 GALLON POLY TANK, NO FITTINGS
22443 51 Gal. Tank #W0030 1

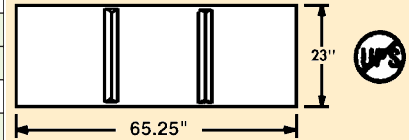

73 GALLON POLY TANK, NO FITTINGS
22470 73 Gal. Tank #W0531 1

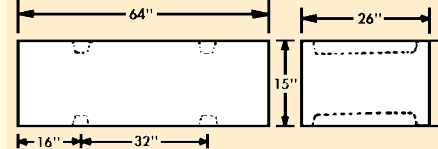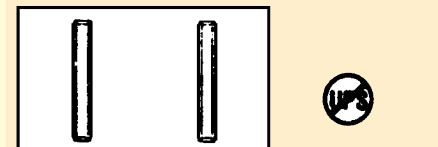

98 GALLON POLY TANK, NO FITTINGS
23729 98 Gal. Tank #W1078 1

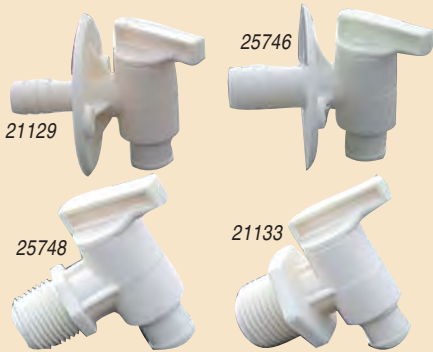

PETERSEN PLASTIC DRAIN COCKS

Durable plastic with UV stabilizer. Replaces most standard fresh water drain cocks. Available with Barb and MPT fittings in 3/8" and 1/2". Bulk.

Models with Flange, Artic White:

- 25745 3/8" MPT #18-957AW 5
- 25746 1/2" Barb #18-958AW 25
- 25747 3/8" Barb #18-959AW 25

Models with Flange, Colonial White:

- 21129 3/8" Barb #18-959CW 25
- 21130 1/2" Barb #18-958CW 25
- 21131 3/8" MPT #18-957CW 5

Models without Flange, Artic White:

- 25748 3/8" MPT #18-964AW 5
- 25749 1/2" MPT #18-966AW 5

Models without Flange, Colonial White:

- 21132 3/8" MPT #18-964CW 5
- 21133 1/2" MPT #18-966CW 5

BRI-RUS
SPECIALTY RECREATION

BRI-RUS SELF-SEALING WATER TANK FITTING

- 1/2 inch barb. • Self-sealing fitting.
- Fits in a 7/8 inch hole. • Made in the USA.

Directions for Installation: • Drill a 7/8" hole at desired location. • Back the nut off to the end of threads. • Insert fitting into hole at a 45° angle, snap into place. • Pull down on fitting and slowly turn clockwise until snug and O ring is seated.

68655 Water Tank Fitting #TF-1 1

JR PRODUCTS DUAL BARBED DRAIN COCK

Durable plastic valve is designed for multiple uses and built to last. The dual size barbed fittings make choosing the right size a snap and the 2" mounting flange helps provide a good seal. The valve will replace most OEM fresh water tank drain valves as well as those mounted on the exterior walls of the RV or boat.

28544 3/8" - 1/2" Dual Barbed Drain Cock, Packaged #03182 1





ABS TANK FILL KITS



“ROCKET” EXTRUDED ABS WATER TANKS



Fill Fittings & Adapters:

The only solvent-weldable water tank; add fittings anywhere. Lightweight, completely algae-free black ABS plastic. Tasteless, odorless and non-toxic. Will never rust or corrode. Made of high-grade plastic polymers. One-piece extruded construction eliminates the possibility of leakage. Baffled every 18 inches for surge control. Easily installed, universal design. Supplied with 3/8" threaded, fitting inserts; three on each end. Choice of fill fittings: elbow, straight or threaded with cap. For non pressure applications. Full one-year warranty.

Rocket Water Tank, 8" x 16" x (L):

- 21550 12"L 6 Gallon #R8012 1
- 20334 18"L 9 Gallon #R8018 1
- 20331 24"L 12 Gallon #R8024 1
- 20332 30"L 15 Gallon #R8030 1
- 21330 60"L 30 Gallon #R8060 1

ROCKET ABS TANK FILL KITS

Each kit includes: 1 1/4" fill fitting; • 1/4" pint solvent cement; • two 3/8" drain/vent adapters; • two 3/8" 90° barbed ells; and 3/8" plug.

- 20263 ^{LS} Elbow Fill Kit, 1 1/2" Barb #RK907 1
- 20264 ^{LS} Straight Fill Kit, 1 1/4" Barb #RK908 1
- 20265 ^{LS} Threaded Fill Kit with Cap, 1 1/2" MPT #RK909 1



ABSTANK FILL FITTINGS & ADAPTERS

- 21066 90° Male Adapter, 3/8" MPT x 3/8" Barb #RF835 25
- 20268 1 1/4" Barbed Elbow #RF907 5
- 20270 1 1/4" Barbed Straight Adapter #RF908 1
- 20272 3/8" FPT Drain Nut #RF922 1



1 1/2" FLUSH SLIP FITTING
21731 1-1/2" Slip Fitting #146 1



LIFESAFE SUPER SEAL TAPE

Emergency repairs, stops leaks, forms solid rubber wrap. Strips clean, leaves no messy adhesive or residue. Holds 100psi at 220°F. Works wet or dry, greasy or dirty. Shrinks about 3% to form an airtight, waterproof seal. Use for outdoor plumbing, automotive hoses, broken water lines, electrical cables, garden hose repair, boat and RV repair, wire bundles, extension cord connectors, sports equipment, tool grips, power tools and rope ends.

- 47900 Super Seal Tape, 1" x 16 ft. #RE3845ES 12




RECTORSEAL CEMENT

ABS CEMENT: For connecting ABS plastic pipe and fittings. Bonds ABS pipe and/or fittings only. Approved for potable water. Dauber-top cans. Black. **ALL PURPOSE CEMENT:** For cementing PVC and/or CPVC to ABS. Dauber-top 4-oz. can. **PVC CEMENT:** For PVC Types I and II potable water, DWV and SW pipe, fittings up to Schedule 40 and up to 6" diameter. Dauber-top can.

- 20277 ABS Cement, 4-oz. #55441 24
- 20269 ABS Cement, 8-oz. #55443 24
- 20802 ABS Cement, Pint #55445 12
- 23363 ABS Cement, Quart #55447 1
- 21353 All Purpose Cement, 4-oz. #55501 24
- 23351 PVC Cement, 4-oz. #55011 24

SEATECH QUICK CONNECT FITTINGS & ACCESSORIES

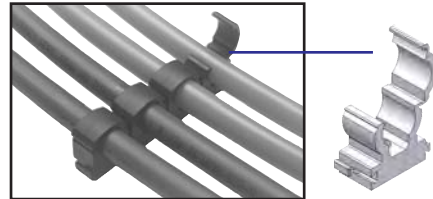

Pipe Clips lock together for a clean installation.



27877 Tubing Cutter



CTS = Copper Tube Size

PEX TUBING

PEX Tubing is NSF listed and FDA recognized.

PEX Tubing, 100' Roll, White:

- 25927 3/8" I.D. #6162 1
- 25928 1/2" I.D. #6163 1

PEX Tubing, 20' Roll, White:

- 25931 3/8" I.D. #6158 10
- 25932 1/2" I.D. #6159 25

SEA TECH ACCESSORIES

- 27858 Pipe Clip 1/2" I.D. (5/8" O.D.) #012370-1557 100
- 28261 ^{LS} Pipe Clip 3/4" I.D. (7/8" O.D.) #012370-2257 50
- 27877 Tubing Cutter #1158-1522 20
- 27878 ^{LS} Repl. Blade for Tubing Cutter #1161-1522 1



AQUA PRO WATER PLUMBING REPAIR KIT

Water plumbing repair kit works with all plumbing systems. No tools needed; uses SeaTech quick-connect fittings.

- 28266 Water Plumbing Repair Kit #35WK-02AQUA 1



SEA TECH QUICK CONNECT FITTINGS

Sea Tech, Inc. was established in 1995 and provides reliable, high-quality, cost-effective solutions for water connection needs. Sea Tech's Quick Connect Water System offers a wide range of standard 1/2" Nominal (5/8" O.D.) fittings and tubing, plus 3/8" Nominal (1/2" O.D.) and 3/4" Nominal (7/8" O.D.) adapters. Fittings have 2 patent pendings on the collet and O-ring guide designs.



TECHNICAL INFORMATION

MATERIAL SPECIFICATION

Material	Fittings Color	O-ring
Thermal Plastic	5/8" O.D. White	EPDM

MAX. PRESSURE AND TEMPERATURE


SIZE	5/8" O.D.	TEMP
WORKING PRESSURE	100 psi	180°F
	6.8 bar	82°C

TORQUE VALUES

THREADS	3/8", 1/2"	3/4"
TORQUE	Min. 17.7 in-lbs Max. 26.5 in-lbs	Min. 22 in-lbs Max. 31 in-lbs

TUBING TOLERANCES


SIZE	TOLERANCE
5/8" O.D.	+0.004" ~ -0.004" +0.10mm ~ -0.10mm

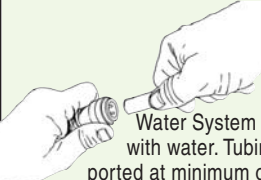

The Sea Tech Water System is designed for use with water. Tubing should be supported at minimum of 36" to prevent excessive load to the connectors. Do not install tubing supports closer than 3" from the connector ends. New installations should be thoroughly tested prior to use. Do not use with explosive gases, petroleum products, or other fuels.




CONNECT TO MULTIPLE MATERIALS!

The Sea Tech System incorporates Stainless Steel Gripping Teeth in its Collet. These corrosion-resistant teeth allow the connectors to interconnect with multiple materials without the need for special tools. • Copper. • CPVC. • PEX, LDPE, MDPE, & HDPE tubings.



THE O-RING GUIDE IS THE KEY!


Sea Tech connectors incorporate an exclusive O-ring Guide for improved reliability. This unique feature insures zero-leak connects by: • Protecting the O-ring from damage during assembly. • Increasing the connector's side load capacity. • Correctly aligning the tubing with the O-ring every time.

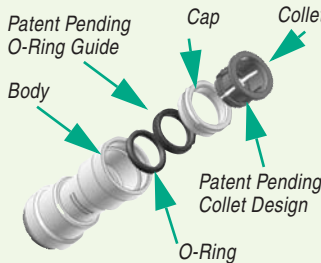


MAKING A CONNECTION

Cut the tubing to length using the Sea Tech tubing cutter or similar. Slight pressure as if to twist the cutter around the tubing will aid cutting.

1 Cut the tubing square using a proper tube cutter. It is essential that the outside diameter of the tubing be free of scratches and damage. The outer surface of the tube needs to be smooth and clean.




2 Mark the insertion depth on the tubing end. Sea Tech connectors have an insertion depth line molded onto the outside of the connector bodies.

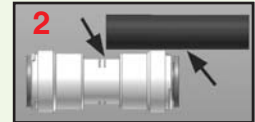

3 Push the tubing into the connector until the insertion mark on the tubing meets the edge of the connector collet.



4 Make certain to push the tubing completely into the connector until it comes into contact with the internal tubing stop.

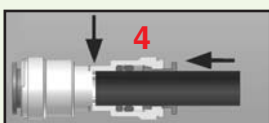

5 To disconnect ensure the system is depressurized before removing connectors. Push the collet in squarely against the face of the fitting. With the collet held in this position, tubing can be removed. The connectors can then be re-used.



ROTATES UNDER PRESSURE!

After a joint is made the tubing can still swivel while connected, even under maximum pressure. The connector's ability to rotate under pressure makes it the ideal connector for vibrating and dynamic applications.

HIGHEST FLOW!

Because Sea Tech connectors join the tubing on the outside, there is no barb fitting on the inside, so flow capacity is increased by more than 30%. Only Sea Tech connectors offer complete flow, allowing for a more efficient water system.




Sea Tech fittings are certified and tested to: • NSF-14; • NSF-641; • CSA B137.5; • ASTM F877. **RVIA Approved.**



Sea Tech connectors utilize a swivel nut with NPS straight threads and a cone seal. This allows the installer to thread onto NPT, NPS, BSP, and most 1/2" male threads without tools or thread sealant. Simply thread on, hand tight, for a zero-leak seal.



3/8" size fittings can be developed by simply snapping a Reducing Stem into any 1/2" fitting.

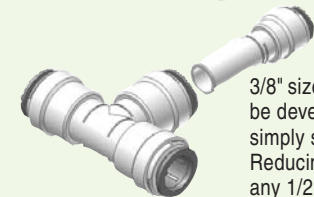

CREATE MINI-MANIFOLDS!

With the Sea Tech Water System small lengths of tubing can be eliminated by using stackable connector configurations. Simply snap together Tees and/or Elbows to create a mini-manifold of fittings. Because all connectors rotate, the direction of the tubing can be orientated by a simple twist, reducing the amount of tubing required to plumb a water system.

STACKABLE ELBOW

Stackable Elbow, CTS Tube Size:



- 28233** 3/8", Bulk #013518-08 80
- 27851** 1/2", Bulk #013518-10 80
- 28037** 1/2", CD/1 #003518-10AQUA 24
- 28234** 3/4", Bulk #013518-14 25

DROP EAR ELBOW

28235 1/2" CTS x 1/2" NPT, Bulk #013521-1008 40



MALE ELBOW

- 27846** 1/2" CTS (B-Tube Size) x 1/2" NPT (A-Thread), Bulk #013519-1008 70
- 28032** 1/2" CTS (B-Tube Size) x 1/2" NPT (A-Thread), CD/1 #003519-1008AQUA 24



SEA TECH QUICK CONNECT FITTINGS

CTS = Copper Tube Size



FEMALE SWIVEL ELBOW



- 28242** 3/8" CTS (B-Tube Size) x 1/2" NPS (A-Thread), Bulk #013520-0808 80
- 27845** 1/2" CTS (B-Tube Size) x 1/2" NPS (A-Thread), Bulk #013520-1008 50
- 28031** 1/2" CTS (B-Tube Size) x 1/2" NPS (A-Thread), CD/1 #003520-1008AQUA 24
- 28243** 1/2" CTS (B-Tube Size) x 3/4" NPS (A-Thread), Bulk #013520-1012 40
- 27857** ^{LS} 1/2" CTS (B-Tube Size) x 3/4" Closet, Bulk #013520-1013 40
- 28244** ^{LS} 1/2" CTS (B-Tube Size) x 3/4" FGHT (A-Thread), Bulk #013520-1014 40

UNION ELBOW

Union Elbow, CTS Tube Size:



- 28231** 3/8", Bulk #013517-08 80
- 27843** 1/2", Bulk #013517-10 60
- 28029** 1/2", CD/1 #003517-10AQUA 24
- 28232** 3/4", Bulk #013517-14 25

STACKABLE HOSE BARB ELBOW



- 28254** 1/2" CTS x 1/2" Hose Barb, Bulk #013512-1008 200

ELBOW PUMP FITTING



- 28252** 1/2" CTS, Bulk #013576-10 50

FEMALE SWIVEL CONNECTOR



- 28239** 3/8" CTS (B-Tube Size) x 1/2" NPS (A-Thread), Bulk #013510-0808 70
- 27847** 1/2" CTS (B-Tube Size) x 1/2" NPS (A-Thread), Bulk #013510-1008 70
- 28033** 1/2" CTS (B-Tube Size) x 1/2" NPS (A-Thread), CD/1 #003510-1008AQUA 24
- 27852** 1/2" CTS (B-Tube Size) x 3/4" NPS (A-Thread), Bulk #013510-1012 50
- 27856** 1/2" CTS (B-Tube Size) x 3/4" CLOSET (A-Thread), Bulk #013510-1013 50
- 28240** ^{LS} 1/2" CTS (B-Tube Size) x 3/4" FGHT (A-Thread), Bulk #013510-1014 50
- 28241** ^{LS} 3/4" CTS (B-Tube Size) x 3/4" NPS (A-Thread), Bulk #013510-1412 40

MALE CONNECTOR



- 28247** 3/8" CTS (B-Tube Size) x 1/2" NPT (A-Thread), Bulk #013501-0808 80
- 27848** 1/2" CTS (B-Tube Size) x 1/2" NPT (A-Thread), Bulk #013501-1008 80
- 28034** 1/2" CTS (B-Tube Size) x 1/2" NPT (A-Thread), CD/1 #003501-1008AQUA 24
- 28248** 1/2" CTS (B-Tube Size) x 3/4" NPT (A-Thread), Bulk #013501-1012 50
- 28249** 1/2" CTS (B-Tube Size) x 3/4" MGHT (A-Thread), Bulk #013501-1014 50
- 28250** 3/4" CTS (B-Tube Size) x 3/4" NPT (A-Thread), Bulk #013501-1412 40

UNION CONNECTOR

Union Connector, CTS Tube Size:




- 28236** 3/8", Bulk #013515-08 80
- 27844** 1/2", Bulk #013515-10 70
- 28030** 1/2", CD/1 #003515-10AQUA 24
- 28237** 3/4", Bulk #013515-14 40

REDUCING UNION



- 27872** 1/2" CTS Tube Size x 1/4" O.D. Tube Size, Bulk #013516-1004 70
- 27873** 1/2" CTS Tube Size x 3/8" CTS Tube Size, Bulk #013516-1008 70
- 28238** 1/2" CTS Tube Size x 3/8" CTS Tube Size, CD/1 #003516-1008AQUA 24

REDUCING STEM CONNECTOR



POLYSULFONE (SHOWN)

35 Series products are manufactured in Polysulfone and certified to NSF-61, NSF-14, CSA B137.5, ASTM F877, IGC 188-04c and recognized by the Uniform Plumbing Code.

Rated 180°F @ 100psi / 75°F @ 250psi

- 28245** 1/2" CTS Stem Size x 3/8" CTS Tube Size, Bulk #013514-1008 60
- 28039** 1/2" CTS Stem Size x 3/8" CTS Tube Size, CD/1 #003514-1008AQUA 24
- 28246** 3/4" CTS Stem Size x 1/2" CTS Tube Size, Bulk #013514-1410 50

ACETAL (NOT PICTURED)

24 Series fittings are manufactured from acetal for general plumbing use. These fittings interconnect with Sea Tech's 35 Series connections.

Rated 140°F @ 100psi / 75°F @ 250psi

- 27874** 1/2" CTS Stem Size x 3/8" CTS Tube Size, Bulk #012414-1008 100
- 27875** 1/2" CTS Stem Size x 1/4" CTS Tube Size, Bulk #012414-1004 100
- 28040** 1/2" CTS Stem Size x 1/4" CTS Tube Size, CD/1 #002414-1004AQUA 24

END STOP



End Stop, CTS Tube Size:

- 28255** 3/8", Bulk #013545-08 100
- 27850** 1/2", Bulk #013545-10 80
- 28036** 1/2", CD/1 #003545-10AQUA 24
- 28256** 3/4", Bulk #013545-14 50

UNION CHECK VALVE

Union Check Valve, 1/2" CTS Tube Size:



- 28258** Bulk #013540-10 50
- 28223** CD/1 #003540-10AQUA 24

HOSE BARB FITTING

Hose Barb Fitting, 1/2" Barb x 1/2" CTS Tube:



- 28004** Bulk #013513-1008 80
- 28041** CD/1 #003513-1008AQUA 24

STACKABLE HOSE BARB UNION



- 28253** 1/2" CTS x 1/2" Hose Barb, Bulk #013511-1008 200

UNION PUMP FITTING

- 28251** 1/2" CTS, Bulk #013575-10 75



SEA-TECH FITTINGS

PLUMBING

L

In Section L: Fresh Water Line Filters Winterizing Pumps Faucet & Shower Sink & Drain Holding Tanks Drain Valves & Fittings Drain Hose Chemicals & Toilets



STACKABLE TEE

Stackable Tee, CTS Tube Size:

- 28226** ^{LS} 3/8", Bulk #013533-08 50
- 27842** 1/2", Bulk #013533-10 50
- 28028** 1/2", CD/1 #003533-10AQUA 16
- 28227** 3/4", Bulk #013533-14 20

SEA TECH QUICK CONNECT FITTINGS

CTS = Copper Tube Size



STOP VALVE

Stop Valve, CTS Tube Size:

- 27849** 1/2", Bulk #013539-10 35
- 28035** 1/2", CD/1 #003539-10AQUA 16

COLLET CLIP



- 28262** Collet Clip 3/8" Bulk #013547-08 500
- 28263** Collet Clip 1/2" Bulk #013547-10 500
- 28210** Collet Clip 1/2" 25/Card #003547-10AQUO 24
- 28264** Collet Clip 3/4" Bulk #013547-14 500



REDUCING TEE

- 28229** 1/2" CTS x 1/4" O.D., Bulk #013524-1004 50
- 28230** 3/4" CTS x 1/2" CTS, Bulk #013524-1410 20

REDUCING STOP VALVE

- 28271** 1/2" CTS x 1/4" O.D., Bulk #013539-1004 35



ELBOW CLIP

1/2" CTS Tube Size.

- 27853** Bulk #2349-15 40



UNION TEE

Union Tee, CTS Tube Size:

- 28224** 3/8", Bulk #013523-08 50
- 27841** 1/2", Bulk #013523-10 50
- 28027** 1/2", CD/1 #003523-10AQUA 24
- 28225** 3/4", Bulk #013523-14 20



STACKABLE 2-WAY VALVE

- 28038** Stackable 2-Way Valve, 1/2" CTS Tube Size, CD/1 #003543-10AQUA 16

REDUCING STACKABLE VALVE

- 27855** 1/2" CTS Tube Size x 1/4" O.D. Tube Size, Bulk #013543-1004 35

SEE SECTION R ("DEALER ITEMS") FOR SEA TECH DISPLAYS



BLACK IRON CRIMPING RINGS

Use proper size crimp ring to attach fitting to tubing. Place ring on tubing, insert fitting, be sure ring is over barb and about 1/8" back from end of tube before crimping.

Black Iron Crimping Rings for PEX, Bag of 100:

- 25895** ^{LS} 3/8" Rings #49PX80900 1
- 25896** 1/2" Rings #49PX80910 1



MALE THREAD TEE

- 28228** 1/2" CTS x 1/2" NPT, Bulk #013530-1008 50



3-WAY BY-PASS VALVE

3-Way By-Pass Valve, 1/2" CTS Tube Size:

- 28257** Bulk #013541-10 20
- 28222** ^{LS} CD/1 #003541-10AQUA g



3-WAY SELECTOR VALVE

3-Way Selector Valve, 1/2" CTS Tube Size:

- 27907** Bulk #013538-10 20
- 28042** CD/1 #003538-10AQUA g



PEX TUBING

PEX Tubing, 100 ft. Roll, White:

- 25927** 3/8" I.D. #6162 1
- 25928** 1/2" I.D. #6163 1
- 25929** ^{LS} US only 3/4" I.D. #6164 1

PEX Tubing, 20 ft. Roll, White:

- 25931** 3/8" I.D. #6158 10
- 25932** 1/2" I.D. #6159 25