


14GP Heavy Duty Pipe Gooseneck

G.V.W.R.	14,000#	AXLES	Two 7,000# EZ Lube w/Electric Brakes
G.A.W.R. (Ea. Axle)	7,000#	SUSPENSION	Multi-Leaf Slipper Spring w/Equalizer
COUPLER	2-5/16" Ball Adjustable Pipe	TIRE	ST235/16 Load Range E
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hook (2 each)	WHEEL	16 x 6 HD White Modular 8 Bolt
JACK	12,000# Drop Leg Jack	FLOOR	2" Pine
NECK	8" Channel	LIGHTS	D.O.T. Stop, Tail, Turn & Clearance
TOP RAIL	3" Square Tubing	ELEC. PLUG	7-Way RV
FRAME	5" x 3" x 5/16" Angle	FINISH (Prep)	Steel is Cleaned to Ensure a Professional Smooth Finish.
CROSSMEMBERS	3" Channel	FINISH	Superior Quality Finish is Applied with Pin-Stripping for a Highly Decorative and Protective Finish.
UPRIGHTS	15" Tall, 3" x 2" x 3/16" Angle		
FENDERS	9" x 72" Double Broke Diamond Plate w/ Back		

Standard Features

- Gooseneck w/2-5/16" Adjustable Pipe Coupler
- Safety Chains Attdhd w/Cold Rolled Eyelets
- 3" Sq. Tube Top Rail
- Tie Down Pockets on Sides& Front
- Floor Secured w/Torx Screws
- Reflective Marker Tape
- Cambered EZ Lube Axles
- Two 7,000# Axles w/Electric Brakes
- Complete Break-A-Way System w/Charger
- Spare Tire Mount
- 4' Slide In Ramps (Channel)
- Grommet Mount Sealed Lighting

Dimensions			
Length	A	B	C
20'	240"	80"	160"
24'	288"	96"	192"

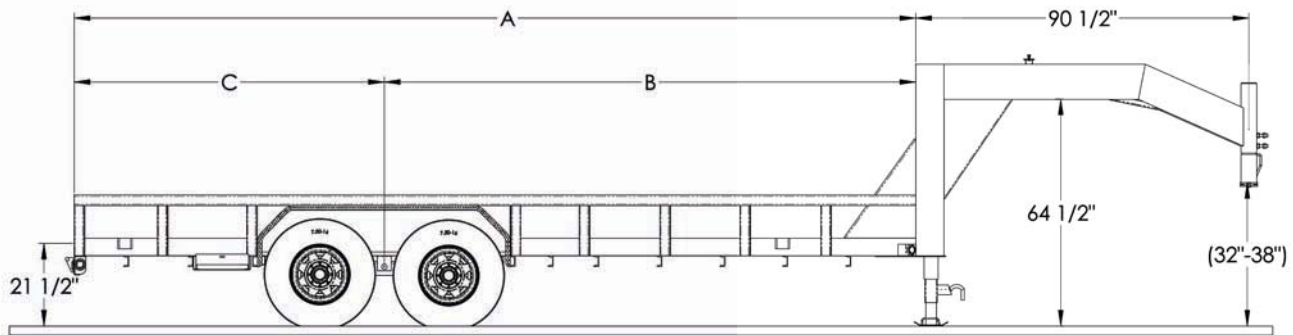

MODEL#	WEIGHT	DESCRIPTION
14GP-20	3,200#	83" x 20' Gooseneck Tandem Axle Pipe Trailer
14GP-24	3,570#	83" x 24' Gooseneck Tandem Axle Pipe Trailer

OPTIONS

Electric Over Hydraulic Brakes (Drums)	Rampgate in Lieu of Ramps
Spare Tire (ST235/80 R-16 LR-E)	Gas Spring Assist Option - Rampgate
Tire Upgrade (ST235/85 R-16 LR-G)	4' Heavy Duty Integrated Ramp Gate w/Gas Spring Assist in Lieu of Ramps
Spare Tire Upgrade (ST235/85 R-16 LR-G)	5' Stand Up Ramps in Lieu of Slide In